



# SMART Transmitter Power Supply HiC2025Y1

- 1-channel isolated barrier
- 24 V DC supply (bus powered)
- Input for 2-wire SMART transmitters
- Output for 4 mA ... 20 mA or 1 V ... 5 V
- Low power dissipation
- SIL 2 (SC 3) acc. to IEC/EN 61508



**SIL 2**



## Function


This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire transmitters in the hazardous area. The device transfers the analog input signal to the non-hazardous area as an isolated current value. Digital signals may be superimposed on the input signal on the field side or control side and are transferred bi-directionally. The output is selected as a current source, current sink, or voltage source via DIP switches. This device mounts on a HiC termination board.

## Application

The device supports the following SMART protocols:

- HART
- BRAIN

## Connection

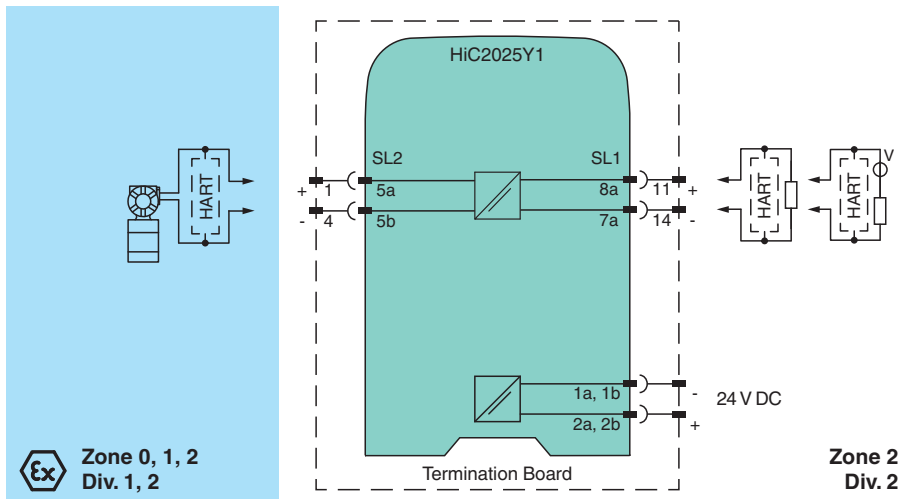

## Technical Data

<b>General specifications</b>	
Signal type	Analog input
<b>Functional safety related parameters</b>	
Safety Integrity Level (SIL)	SIL 2
Systematic capability (SC)	SC 3
<b>Supply</b>	

Release date: 2022-11-14 Date of issue: 2022-11-14 Filename: 70147235\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com



## Technical Data

Connection		SL1: 1a, 1b(-); 2a, 2b(+)
Rated voltage	$U_r$	19 ... 30 V DC bus powered via Termination Board
Ripple		$\leq 10 \%$
Rated current	$I_r$	$\leq 45 \text{ mA}$ at 24 V and 20 mA source mode output
Power dissipation		$\leq 800 \text{ mW}$
Power consumption		$\leq 1.1 \text{ W}$
<b>Input</b>		
Connection side		field side
Connection		SL2: 5a(+), 5b(-)
Input signal		4 ... 20 mA limited to approx. 26 mA
Available voltage		$\geq 15 \text{ V}$ at 20 mA ; $\geq 18 \text{ V}$ at 4 mA
<b>Output</b>		
Connection side		control side
Connection		SL1: 8a(+), 7a(-)
Load		0 ... 350 $\Omega$ (source mode)
Output signal		source mode: 4 ... 20 mA or 1 ... 5 V (internal resistor: 250 $\Omega$ , 0.1 %) sink mode: 4 ... 20 mA, operating voltage 10 ... 30 V For additional internal or external loads the voltage drop has to be considered, e. g. 250 $\Omega$ x 20 mA = 5 V.
Ripple		20 mV <sub>rms</sub>
<b>Transfer characteristics</b>		
Deviation		at 20 °C (68 °F) $< 0.1 \%$ of full scale, incl. non-linearity and hysteresis (source mode and sink mode 4 ... 20 mA) $\leq \pm 0.2 \%$ incl. non-linearity and hysteresis (source mode 1 ... 5 V)
Influence of ambient temperature		$< 2 \mu\text{A/K}$ (-20 ... 70 °C (-4 ... 158 °F)); $< 4 \mu\text{A/K}$ (-40 ... -20 °C (-40 ... -4 °F)) (source mode and sink mode 4 ... 20mA) $< 0.5 \text{ mV/K}$ (-20 ... 70 °C (-4 ... 158 °F)); $< 1 \text{ mV/K}$ (-40 ... -20 °C (-40 ... -4 °F)) (source mode 1...5 V)
Frequency range		field side into the control side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB)
Settling time		$\leq 50 \text{ ms}$
Rise time/fall time		$\leq 10 \text{ ms}$
<b>Galvanic isolation</b>		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply		basic insulation according to IEC/EN 61010-1, rated insulation voltage 60 V <sub>eff</sub>
<b>Indicators/settings</b>		
Display elements		LED
Control elements		DIP switch
Configuration		via DIP switches
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		
		NE 21:2017 EN 61326-3-2:2018 For further information see system description.
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2012
<b>Ambient conditions</b>		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Mass		approx. 100 g
Dimensions		12.5 x 106 x 128 mm (0.5 x 4.2 x 5.1 inch) (W x H x D)

Release date: 2022-11-14 Date of issue: 2022-11-14 Filename: 70147235\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group  
www.pepperl-fuchs.com

 USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com


 **PEPPERL+FUCHS**

**Technical Data**

Mounting	on termination board	
Coding	pin 1 and 3 trimmed For further information see system description.	
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate	CESI 06 ATEX 017	
Marking	Ⓢ II (1)G [Ex ia Ga] IIC Ⓢ II (1)D [Ex ia Da] IIIC Ⓢ I (M1) [Ex ia Ma] I	
Input	Ex ia	
<b>Supply</b>		
Maximum safe voltage	$U_m$	250 V AC (Attention! $U_m$ is no rated voltage.)
Equipment	SL2: 5a(+), 5b(-)	
Voltage	$U_o$	25.2 V
Current	$I_o$	100 mA
Power	$P_o$	630 mW
Internal capacitance	$C_i$	5.7 nF
Internal inductance	$L_i$	negligible
<b>Certificate</b>		
Marking	Ⓢ II 3G Ex ec IIC T4 Gc	
<b>Directive conformity</b>		
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-7:2015	
<b>International approvals</b>		
UL approval	E106378	
Control drawing	116-0458 (cULus)	
<b>IECEx approval</b>		
IECEx certificate	IECEx CES 06.0002X	
IECEx marking	[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc	
<b>General information</b>		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .	

**Assembly**

Front view

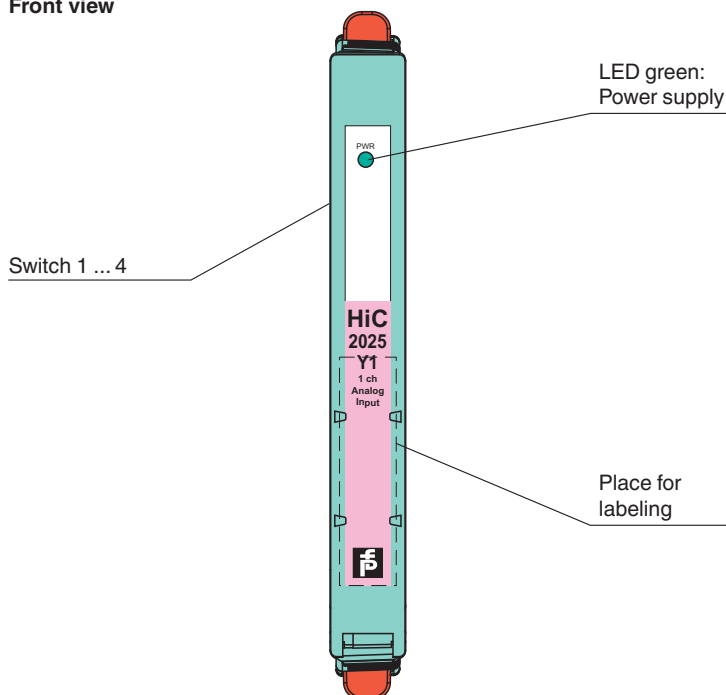

Release date: 2022-11-14 Date of issue: 2022-11-14 Filename: 70147235\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**Configuration**

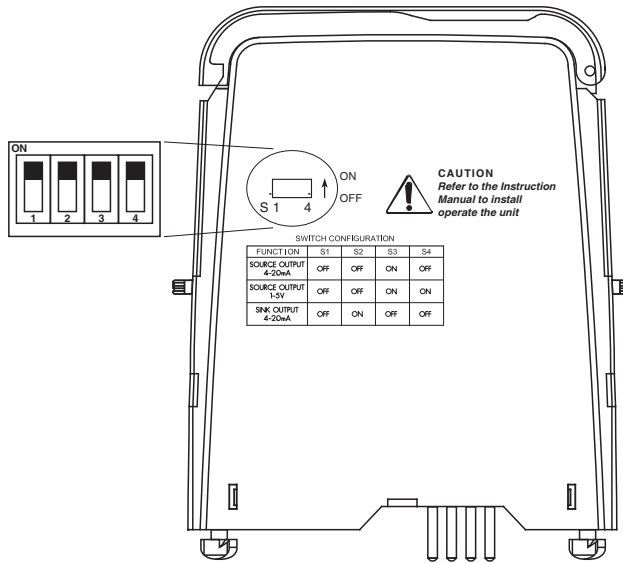

**Switch position**

Function	S1	S2	S3	S4
Current source 4 mA ... 20 mA	OFF	OFF	ON	OFF
Voltage source 1 V ... 5 V	OFF	OFF	ON	ON
Current sink 4 mA ... 20 mA	OFF	ON	OFF	OFF

Factory setting: current source 4 mA ... 20 mA

**Configuration**

Configure the device in the following way:

- Push the red Quick Lok Bars on each side of the device in the upper position.
- Remove the device from Termination Board.
- Set the DIP switches according to the figure.



*The pins for this device are trimmed to polarize it according to its safety parameter. Do not change! For further information see system description.*

Release date: 2022-11-14 Date of issue: 2022-11-14 Filename: 70147235\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".