



Voltage Repeater

HiC2065

- 1-channel isolated barrier
- 24 V DC supply (bus powered)
- Voltage input 0 mV ... ± 50 mV
- Voltage output 0 mV ... ± 50 mV
- Selectable up/downscale sensor breakage detection
- Fault output signal




Function

This isolated barrier is used for intrinsic safety applications. It transfers low voltage signals from thermocouples, load cells, strain gauges, operational amplifiers, and inductive oscillation sensors located in hazardous areas to safe areas. The input voltage of the terminals 5a and 5b is transferred to the terminals 7a and 8a. The input, output, and power supply are galvanically isolated from each other. Upscale or downscale lead breakage monitoring is selectable via switches located on the front panel of the device.

Note: This unit requires three minutes after power-up to reach the accuracy cited in the technical data.

Connection

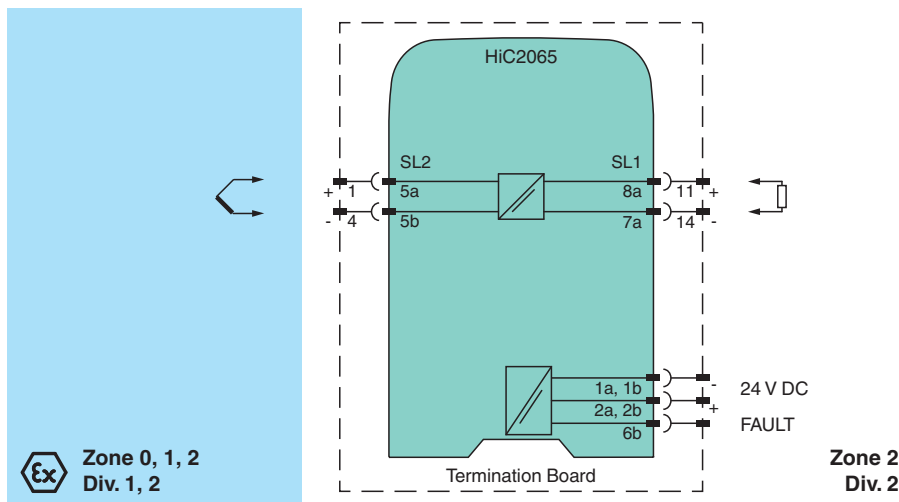

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 204304_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Configuration

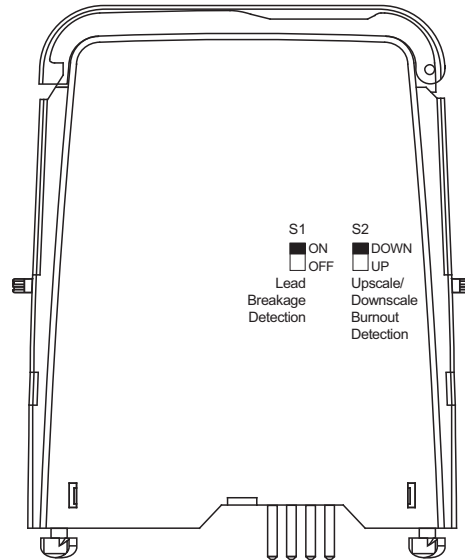

Technical Data

General specifications		
Signal type	Analog input	
Supply		
Connection	SL1: 1a, 1b(-); 2a, 2b(+)	
Rated voltage	U_r	20 ... 30 V DC bus powered via Termination Board
Ripple	within the supply tolerance	
Rated current	I_r	≤ 22 mA
Power dissipation/power consumption	0.7 W max.	
Lockout voltage	> 11 V DC	
Input		
Connection side	field side	
Connection	SL2: 5a(+), 5b(-)	
Input resistance	≥ 16 M Ω	
Transmission range	0 ... ± 50 mV	
Offset voltage/current	≤ 5 μ V / ≤ 5 nA	
Output		
Connection side	control side	
Connection	SL1: 8a(+), 7a(-)	
Voltage	0 ... ± 50 mV	
Load	Accuracy figures for infinite load impedance. Additional 0.03 % of span for a load resistance of 10 k Ω	
Output resistance	max. 3 Ω	
Line fault detection	input: ± 100 mV output: +200 mV, -115 mV	
Fault indication output		
Connection	SL1: 6b	
Output type	open collector transistor (internal fault bus)	
Fault voltage	$< V_{cc}/2$ (when connected to V_{cc} via 10 k Ω pull up resistor)	
Transfer characteristics		
Deviation		

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 204304_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
www.pepperl-fuchs.com

 USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Technical Data

After calibration		at 20 °C (68 °F): ± 3 µV up to ± 10mV/± 0.05 % of the span up to +50 mV/± 0.05 % of the span up to -50 mV
Influence of ambient temperature		± 1 µV/K (typical ± 0.25 µV/K)
Absolute		< 0.25 K at 30 V voltage supply
Bandwidth		DC to > 350 Hz (-3 dB)
Settling time		< 2 ms
Rise time/fall time		≤ 1 ms
Galvanic isolation		
Output/power supply		functional insulation, rated insulation voltage 50 V AC
Indicators/settings		
Display elements		LEDs
Control elements		DIP switch
Configuration		via DIP switches
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2006 For further information see system description.
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Mass		approx. 100 g
Dimensions		12.5 x 106 x 128 mm (0.5 x 4.2 x 5.1 inch) (W x H x D)
Mounting		on termination board
Coding		pin 2, 3 and 4 trimmed For further information see system description.
Data for application in connection with hazardous areas		
EU-type examination certificate		BASEEFA 10 ATEX 0031X
Marking		⊕ II (1)GD, I (M1), [Ex ia] IIC, [Ex iaD], [Ex ia] I (-20 °C ≤ T _{amb} ≤ 60 °C) [circuit(s) in zone 0/1/2]
Voltage	U _o	5.5 V DC
Current	I _o	2.4 mA
Power	P _o	3.3 mW
Supply		
Maximum safe voltage	U _m	253 V (Attention! The rated voltage can be lower.)
Certificate		BASEEFA 10 ATEX 0032X
Marking		⊕ II 3G Ex nA II T4
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013, EN 60079-11:2012, EN 60079-15:2010
International approvals		
UL approval		
Control drawing		116-0317 (cULus)
IECEx approval		
IECEx certificate		IECEx BAS 10.0012X IECEx BAS 10.0013X
IECEx marking		[Zone 0] [Ex ia] IIC, [Ex iaD], [Ex ia] I Ex nA II T4

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 204304_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

General information

Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
---------------------------	---

Assembly

Front view

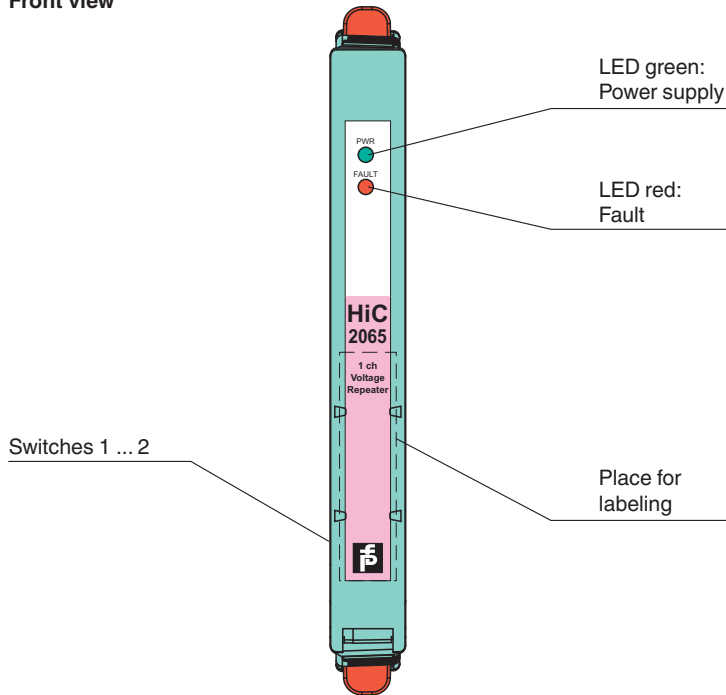

Release date: 2022-09-15 Date of issue: 2022-09-15 Filename: 204304_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Configuration

Configure the device in the following way:

- Push the red Quick Lok Bars on each side of the device in the upper position.
- Remove the device from Termination Board.
- Set the DIP switches according to the figure.



*The pins for this device are trimmed to polarize it according to its safety parameter. Do not change!
For further information see system description.*