



SMART Transmitter Power Supply/SMART Current Driver

KCD2-SCS-2


- 2-channel signal conditioner
- 24 V DC supply (Power Rail)
- Analog input (AI), Analog output (AO)
- Operates as transmitter power supply or current driver
- Housing width 12.5 mm
- Up to SIL 2 (SC 3) acc. to IEC/EN 61508



Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. Each device channel works as a transmitter power supply or a current driver. The device transfers data by using a current signal. The device supports a bi-directional communication for SMART devices that use current modulation to transmit data and voltage modulation to receive data. For current driver operation, an open field circuit presents a high impedance to the control side to allow lead breakage to be monitored by control systems.

Connection

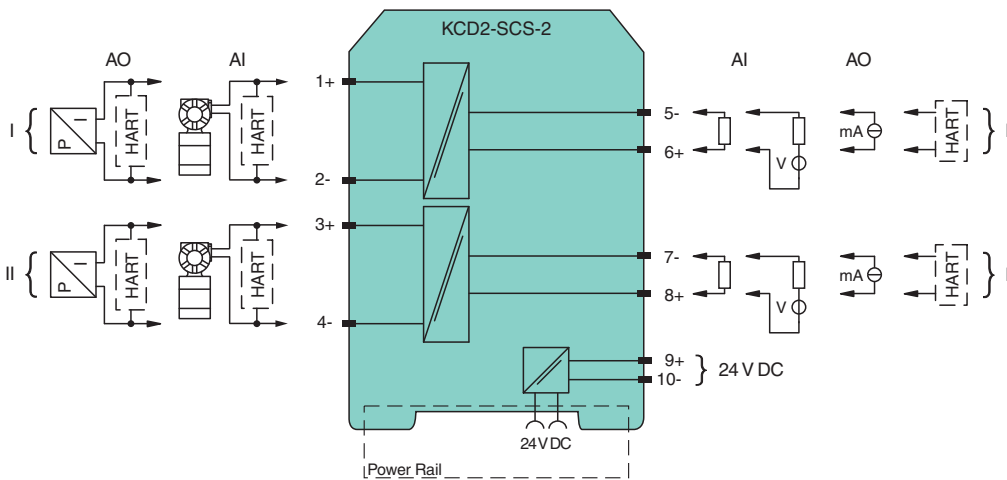

Technical Data

General specifications	
Signal type	Analog input/analog output
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 2
Systematic capability (SC)	SC 3
Supply	
Connection	Power Rail or terminals 9+, 10-
Rated voltage	U_r 19 ... 30 V DC
Ripple	max. 10 %
Rated current	I_r max. 88 mA at 24 V

Release date: 2023-01-03 Date of issue: 2023-01-03 Filename: 70130558_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Power dissipation	max. 1.4 W
Power consumption	max. 2.1 W
Analog input	
Number of channels	2
Suitable field devices	2-wire SMART transmitters
Signal	0/4 ... 20 mA , limited to approx. 30 mA
Field circuit	
Available voltage	min. 15 V at 20 mA min. 18 V at 4 mA
Control circuit	
Input voltage	terminals 5-, 6+; 7-, 8+
Load	Voltage across terminals 10 ... 30 V. If the current is supplied from a source > 24 V, series resistance of $\geq (V - 24)/0.02 \Omega$ is needed, where V is the source voltage. The maximum value of the resistance is $(V - 10)/0.02 \Omega$. (sink output)
Ripple	max. 350 Ω (source output)
	20 mV _{eff}
Analog output	
Number of channels	2
Suitable field devices	SMART I/P converters (positioner), on-site-displays
Signal	0/4 ... 20 mA , limited to approx. 30 mA
Field circuit	
Load	terminals 1+, 2-, 3+, 4-
Voltage	max. 650 Ω
Ripple	min. 13 V at 20 mA
	20 mV _{eff} , on all signal terminals
Control circuit	
Voltage drop	terminals 5-, 6+; 7-, 8+
Line fault detection	max. 6 V
	> 100 k Ω at max. 30 V, with field wiring open
Transfer characteristics	
Deviation	max. 20 μ A incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature	< 2 μ A/K (-40 ... 70 °C (-40 ... 158 °F))
Frequency range	field side into the control side: bandwidth with 0.5 V _{pp} signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V _{pp} signal 0 ... 3 kHz (-3 dB)
Settling time	max. 200 ms
Rise time/fall time	max. 100 ms (10 ... 90 %)
Galvanic isolation	
Field circuit/control circuit	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Control circuit/control circuit	functional isolation, rated voltage: 50 V
Field circuit/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Control/power supply	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings	
Display elements	LED
Configuration	via DIP switches
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Electromagnetic compatibility	NE 21:2017 EN 61326-3-2:2018
Degree of protection	IEC 60529
Ambient conditions	
Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications	
Degree of protection	IP20
Connection	screw terminals

Release date: 2023-01-03 Date of issue: 2023-01-03 Filename: 70130558_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data







Mass	approx. 115 g
Dimensions	12.5 x 124 x 114 mm (0.5 x 4.9 x 4.5 inch) (W x H x D) , housing type A2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Function

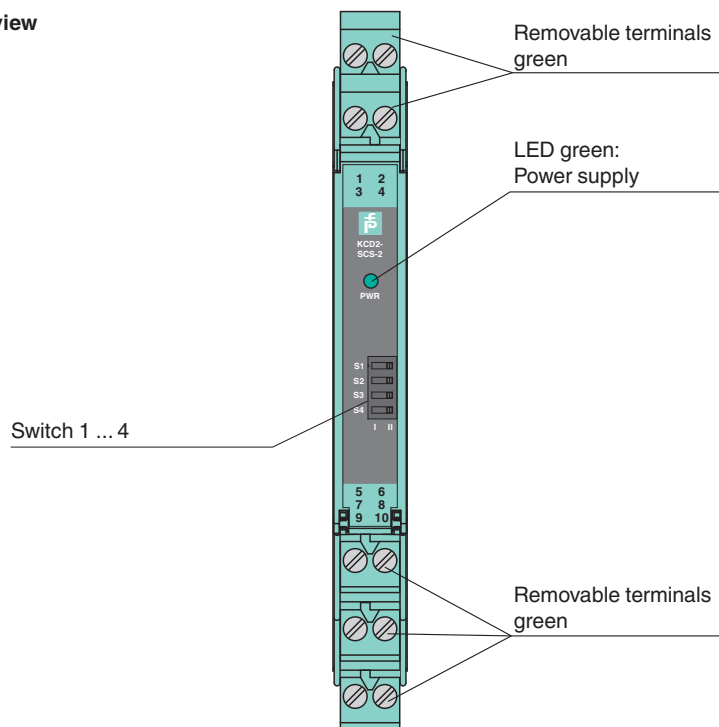


Front view




Matching System Components

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-GY	Profile rail, wiring comb field side, gray
	K-DUCT-GY-UPR-03	Profile rail with UPR-03-* insert, 3 conductors, wiring comb field side, gray

Accessories

	EBP 2- 5	Insertion bridge for connectors, 2-pin, fully insulated
	KC-ST-5GN	Terminal block for KC modules, 2-pin screw terminal, green
	KF-CP	Red coding pins, packaging unit: 20 x 6

Configuration

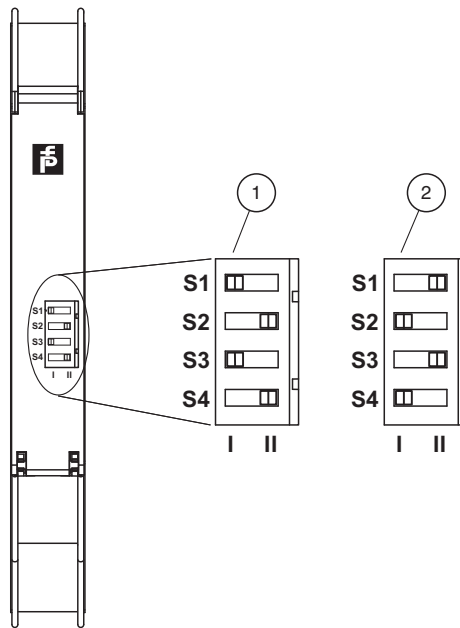

- 1 Analog input with current source output
- 2 Analog input with current sink output, analog output

Switch position

Function		Switch			
		Channel 1		Channel 2	
Field side	Control side	S1	S2	S3	S4
Analog input	Current source	I	II	I	II
Analog input	Current sink	II	I	II	I
Analog output		II	I	II	I

Factory setting: analog input with current source output

Release date: 2023-01-03 Date of issue: 2023-01-03 Filename: 70130558_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".