

**Features**

- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Current input/output 4 mA ... 20 mA
- HART I/P or transmitter power supply
- Low voltage drop
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC 61508

**Function**


This isolated barrier is used for intrinsic safety applications. It is loop powered and isolates a 4 mA ... 20 mA signal for transmitters and positioners and is HART compatible.

With a noticeably lower power loss compared to active isolator modules, the barriers 5 V drop makes it suitable for transmitter applications with unstable power sources between 20 V DC ... 30 V DC.

Line fault detection of the field circuit is possible if the control loop in the safe area is monitored for overscale or underscale conditions of the 4 mA ... 20 mA range.


The module can also be used for controlling solenoid valves and discrete outputs, such as LEDs. In this case, terminals 8- and 9+ are driven with a 24 V signal.

**Assembly**

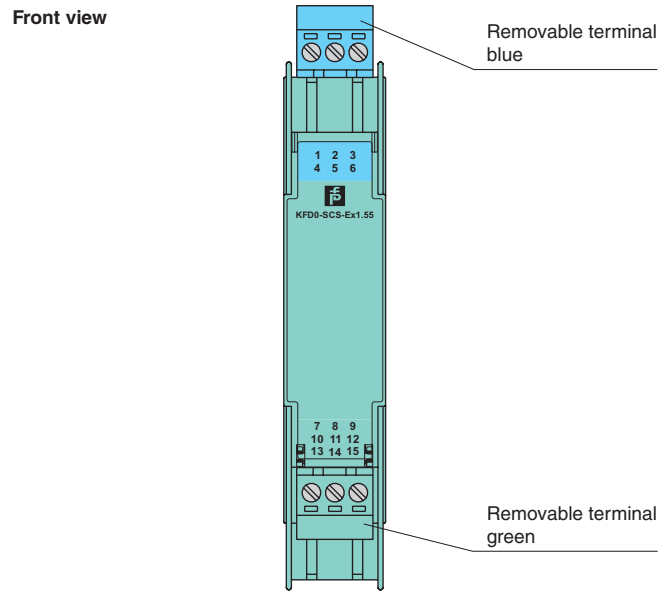

**SIL 2**

**Connection**

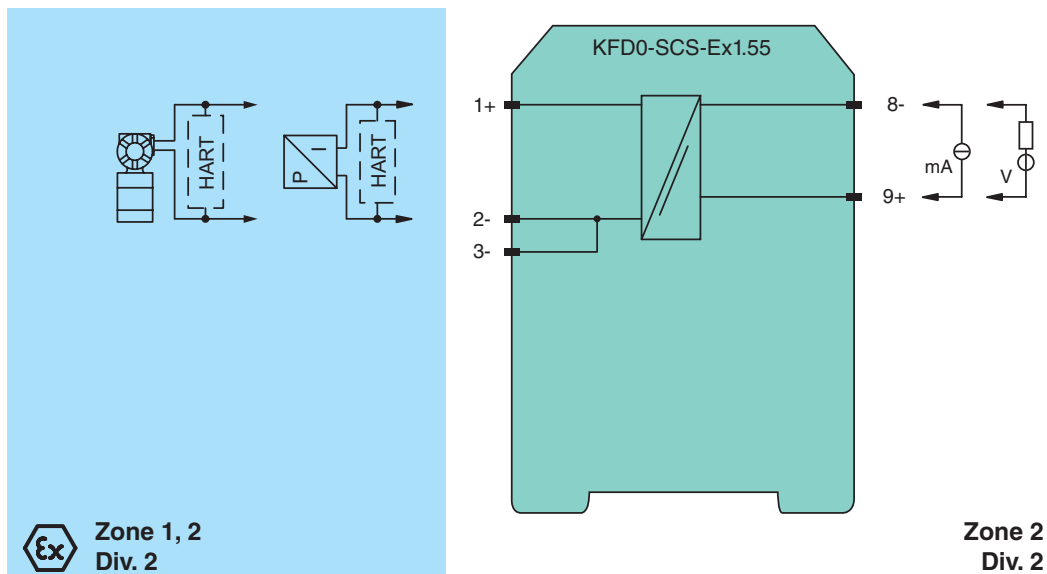

Release date 2017-08-09 14:20 Date of issue 2017-08-09 240495\_eng.xml



Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>		
Signal type		Analog input/analog output
<b>Functional safety related parameters</b>		
Safety Integrity Level (SIL)		SIL 2
<b>Supply</b>		
Rated voltage	$U_r$	loop powered
Power dissipation		0.2 W
<b>Control circuit</b>		
Connection		terminals 8-, 9+
Voltage		$\leq 30$ V DC
Current		4 ... 20 mA (quiescent current $< 0.5$ mA)
Power dissipation		150 mW at 20 mA and $U_{in} < 24$ V
<b>Field circuit</b>		
Connection		terminals 1+, 2 / 3-
Voltage		$\geq 16$ V for supply voltage $> 21$ V
Current		4 ... 20 mA (linear transmission 1 ... 22 mA)
Load		$\leq 800 \Omega$ (at 20 mA)
<b>Transfer characteristics</b>		
Voltage drop		see note
Deviation		
After calibration		$\leq \pm 80 \mu\text{A}$ linearity, load and voltage dependence at 20 °C (68 °F)
Influence of ambient temperature		$< 0.5 \mu\text{A/K}$
Damping		approx. 3 dB
Rise time		$\leq 20 \mu\text{s}$ at 0 $\Omega$ , $\leq 600 \mu\text{s}$ with 800 $\Omega$ load
<b>Galvanic isolation</b>		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
<b>Indicators/settings</b>		
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2007
Degree of protection		IEC 60529:2001
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 120 g
Dimensions		20 x 124 x 115 mm (0.8 x 4.9 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		PTB 02 ATEX 2064
Marking		 II (2)G [Ex ib] IIC
Voltage	$U_o$	23.1 V DC
Current	$I_o$	28 mA
Power	$P_o$	0.647 W
<b>Supply</b>		
Maximum safe voltage	$U_m$	253 V (Attention! The rated voltage can be lower.)
Certificate		PF 11 CERT 0902 X
Marking		 II 3G Ex nA IIC T4 Gc
<b>Galvanic isolation</b>		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
<b>Directive conformity</b>		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>		
FM approval		device with FM approval on request
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2017-08-09 14:20 Date of issue 2017-08-09 240495\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com


**Additional information**

In addition, the voltage drop across the resistance (load) of the active measurement input must be considered when calculating the field voltage (terminals 1+ and 2-).

Lead breakage monitoring is possible by means of the reaction of the field current signal to the control side, which means the control system must monitor whether the 4 mA ... 20 mA range was exceeded or fallen short of.


SMART repeater supply isolator for **active** interfaces  
Transmitters with or without HART

Voltage drop in case of 20 mA:  
max. 5 V

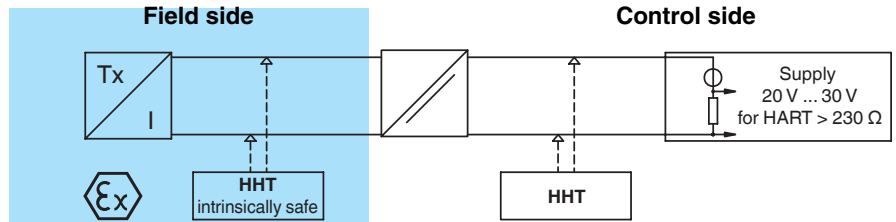


SMART repeater for **passive** interfaces  
Transmitters with or without HART

Voltage drop in case of 20 mA:  
max. 5 V

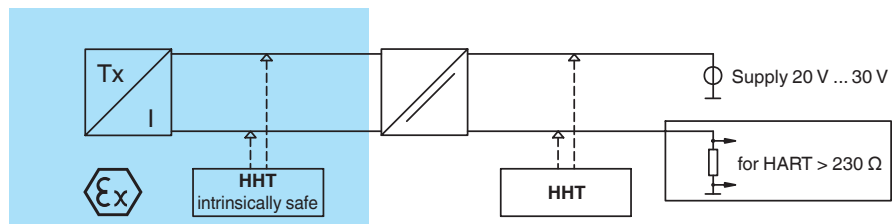

Current driver for positioners, I/P converters  
Positioners with or without HART

Voltage drop in case of 20 mA:  
5 V, 500 Ω ... 800 Ω load  
6 V, 250 Ω load  
8 V, 50 Ω load

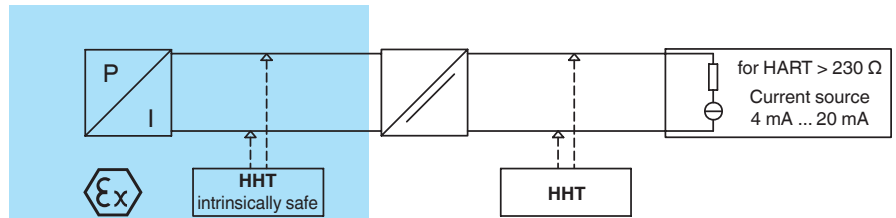

Release date 2017-08-09 14:20 Date of issue 2017-08-09 240495\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".