

فکس : ۸۸۸۹۱۶۳۸ تامین صنعت پارلاتک تلفن: ۸۸۸۹۶۵۳۸

JDN AIR HOISTS MINI



J·D·NEUHAUS
1745
engineered for extremes

www.parla-tech.com

JDN AIR HOISTS MINI



The mini series at a glance



Energy supply
(spiral hose)



Manual trolleys

Special grease for
oil-free operation



mini in manipulator version

Galvanised chain
3 standard lifting heights

Sensitive control
3 standard control lengths

Explosion classification
 Ex II 3 GD IIA T4

Mini tool box consisting of:
mini with 3 m lift and 2 m control length in practical transport box incl. 6 m supply hose and couplings





The JDN mini series for general duty


Carrying capacities: 125 kg, 250 kg, 500 kg, 980 kg
Air pressure: 6 bar

The **mini** widens the range of applications in the light duty sector as a handy, flexible and universally deployable hoist making it an ideal tool for a wide range of light/medium manufacturing applications.

mini Manipulator

With the **mini** manipulator loads can be lifted, lowered, manually traversed and positioned with only one hand. Further information on request.

Explosion Classification: Ex II 3 GD IIA T4

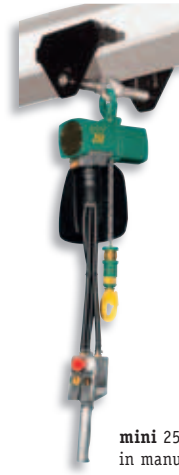

The advantages at a glance

- Price competitive alternative when compared to other types of powered hoists.
- Suitable for lube-free operation.
- Suitable for application in hazardous areas.
- Minimum components for ease of maintenance.
- Wear resistant motor braking system.
- Lightweight for easy handling.
- Also suitable for horizontal pulling.
- Extremely sensitive lever control with emergency shut-off valve, max. control length 6 m.
- Available lifting heights: up to 8 m.
- With chain box as standard.
- With manual trolley as option.

Technical Data

Type		mini 125	mini 250	mini 500	mini 1000
Capacity	lbs	275	550	1100	2160
	kg	125	250	500	980
Number of chain strands		1	1	1	1
Motor output	kW	0.4	0.4	1	1
Air pressure	PSI	85	85	85	85
	bar	6	6	6	6
Lifting speed without load ¹	ft/min	130	65	65	33
	m/min	40	20	20	10
Lifting speed at full load ¹	ft/min	49.5	26	33	16
	m/min	15	8	10	5
Lowering speed at full load	ft/min	99	52	59	33
	m/min	30	16	18	10
Lowering speed without load	ft/min	78.7	39.4	39.4	19.7
	m/min	24	12	12	6
Air consumption at full load – lifting	cfm	17.5	17.5	42.5	42.5
	m ³ /min	0.5	0.5	1.2	1.2
Air consumption at full load – lowering	cfm	24.7	24.7	56.5	56.5
	m ³ /min	0.7	0.7	1.6	1.6
Air connection		G 3/8	G 3/8	G 1/2	G 1/2
Hose dimension (Ø inside)	inch	3/8	3/8	1/2	1/2
	mm	9	9	13	13
Weight with 10 ft / 3 m lift	lbs	21	23.1	46.2	50.6
	kg	9.5	10.5	21	23
Chain dimension	mm	4 x 12	4 x 12	7 x 21	7 x 21
Weight of chain	lbs/ft	0.23	0.23	0.67	0.67
	kg/m	0.35	0.35	1.0	1.0
Height of lift	ft	10/16/26			
	m	3/5/8			
Length of control at standard lift	ft	6.5/13/20			
	m	2/4/6			
Noise level at full load ² – lifting	dB(A)	79	79	77	77
Noise level at full load ² – lowering	dB(A)	80	80	83	83

Group mechanism: M3 (1 Bm)

¹ Lifting speed at 2 m length of control. Longer control hoses decrease the lifting speeds.


² Measured at 1 m distance acc. to DIN 45635 part 20

JDN AIR HOISTS MINI



Dimensions


Type		mini 125	mini 250	mini 500	mini 1000
A	inch mm	12.9 328	12.9 328	18.0 458	18.0 458
B	inch mm	9.1 232	9.1 232	12.4 316	12.4 316
C	inch mm	14.4 367	14.4 367	19.9 505	19.9 505
D	inch mm	3.6 92	3.6 92	4.8 122	4.8 122
E	inch mm	8.4 213	8.4 213	11.5 292	11.5 292
F	inch mm	4.3 109	4.3 109	5.8 148	5.8 148
G	inch mm	4.1 104	4.1 104	5.6 144	5.6 144
H	inch mm	7 177	7 177	9.2 234	9.2 234
J	inch mm	5.8 148	5.8 148	7.6 194	7.6 194
K	inch mm	3.3 83	3.3 83	4.7 119	4.7 119
L	inch mm	1.1 29	1.1 29	1.6 40	1.6 40
M	inch mm	0.7 19	0.7 19	1.1 28	1.1 28

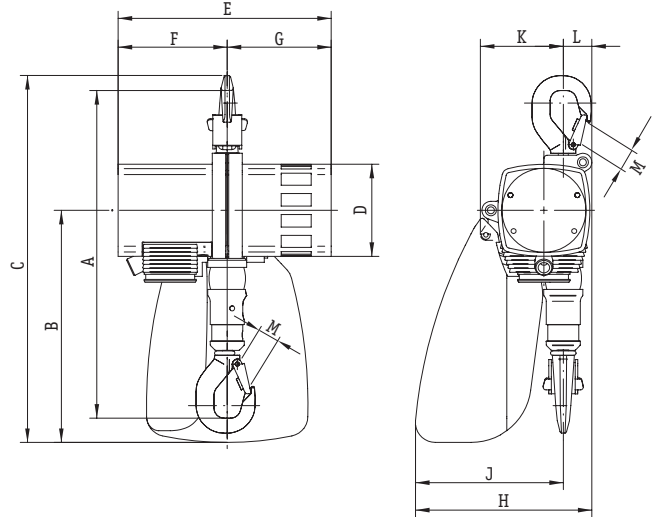

Manual Trolleys for JDN Air Hoists mini

Technical Data

Type		LN 250	LN 1000
Capacity	lbs	550	2200
	kg	250	1000
Beam flange width b	inch	2-8	2-8
	mm	50-220	58-220
max. flange thickness t	inch	1.3	1.2
	mm	34	30
min. curve radius	inch	35.4	39.4
	m	0.9	1.0
Weight	lbs	17	21
	kg	7.7	10.5

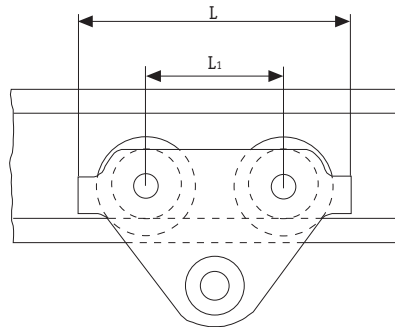

Dimensions

Type		LN 250	LN 1000
A	inch mm	3.1 79	3.1 79
D	inch mm	0.7 17	0.7 17
D ₁	inch mm	1 25	1.2 30
D ₂	inch mm	1.2 30	1.4 35
H ₁	inch mm	1.2 30	1 25
I	inch mm	2.7 67.5	3.2 81.5
L	inch mm	10.2 260	10.2 260
L ₁	inch mm	5.1 130	5.1 130
O	inch mm	2.2 55	2.7 68
T	inch mm	5.7 144	5.9 151

