



VHF AND UHF DIGITAL REPEATERS

**IC-FR5200H**

VHF Repeater (50W)

**IC-FR6200H**

UHF Repeater (50W)

# 50W Full Duty Cycle Digital Repeater



**IDAS™**  
ICOM DIGITAL ADVANCED SYSTEM



**TYPE-D**

## 50W 100% Duty Cycle Operation

Employing a high performance power amplifier, together with the solid heatsink built into the chassis, the IC-FR5200H series provides a reliable 100% duty cycle operation at 50W output.

## IDAS, Analog FM and Mixed Mode

The IC-FR5200H series is compatible with both analog FM mode and IDAS conventional and NXDN™ Type-D trunking\* mode. Program digital and/or analog FM modes per channel. The mixed mode operation allows you to receive both analog FM and IDAS conventional modes and to transmit either mode depending on the received signal.

## 32 Channel Capacity and 5 Programmable Buttons

The 12-digit dot-matrix display, 5 programmable buttons, 32 memory channels and internal speaker allow you to use the repeater as a simple base station or to check repeater activity. LEDs on the front panel show channel conditions.

## Built-in Type-D Trunking and Network Controller\*

The Type-D multi-site trunking/conventional functions are integrated in the repeater. The IP network capability extends your communication coverage and allows you to remotely control the repeater settings.

\* Type-D Trunking and network controller functions are not available, depending on version.

## D-SUB 25-pin Accessory Connector

The IC-FR5200H series has a programmable D-SUB 25-pin accessory connector for connecting external remote control devices. Also, modulation/demodulation signals can be input/output from the D-SUB connector.

## Multiple CTCSS, DTCS Tone and RAN Code Decode

The IC-FR5200H series decodes multiple CTCSS and DTCS as well as digital RAN (Radio Access Number) codes on a per channel basis (up to 16 tones/codes) and downlinks the received signal with a specified tone/code. This function is useful for sharing a channel with multiple groups.




## Other Features

- CW ID transmission
- ±0.5ppm high frequency stability (Digital mode)
- 2U low profile for 19-inch rack mount
- Digital voice scrambler provides 15-bit key (about 32,000 codes)
- Built-in inversion voice scrambler (Analog mode)
- Built-in audio compander (Analog mode)
- PTT priority setting (Local Mic., external PTT or repeater operation)
- 5-Tone and DTMF encoder/decoder (Analog mode)
- Normal and priority scan
- Convenient key assign stickers supplied
- Beat cancel capability
- Low voltage alert (Analog mode)

## SPECIFICATIONS

	IC-FR5200H	IC-FR6200H
<b>GENERAL</b>		
Frequency coverage	136–174MHz	400–470, 450–512, 450–520, 350–400* MHz (* Non-FCC)
Number of channels	Max. 32 channels	
Channel spacing	6.25/12.5/25kHz*	
Type of emission	16K0F3E, 11K0F3E/F7E/F7D/F7W, 4K00F1E/F1D/F3E	
Frequency stability	±0.5ppm	
Antenna impedance	50Ω (Type-N x 2)	
Operating temperature range	–30°C to +60°C; –22°F to +140°F	
Power supply voltage	13.6V DC	
Current drain TX 50W (at 13.6V DC)	11A	
RX Max. audio	1.2A	
Stand-by	550mA/450mA typ. (with/without UC-FR5000 at LCD backlight OFF)	
Dimensions (WxHxD)	483x88x360 mm ; 19.02x3.46x14.17 in	
Weight	10kg ; 22lb (approx.)	
<b>TRANSMITTER</b>		
Output power	50W (adjustable to 5W)	
100% duty cycle	50W (at 20–35°C, 24 hours)	
Max. frequency deviation	±5.0kHz/±2.5kHz (W/N)	
Spurious emissions	80dB typ.	
FM hum and noise	52/49dB typ. (W/N)	50/45dB typ. (W/N)
Audio harmonic distortion	1% typ. (40% deviation)	
Digital FSK error	5% Max.	
Microphone impedance	600Ω (8-pin modular)	
<b>RECEIVER</b>		
Sensitivity 12dB SINAD 5% BER	0.30μV typ. 0.25μV typ.	0.25μV typ. 0.25μV typ.
Adjacent channel selectivity	85/56dB typ. (W/N) 68dB typ. (Digital)	78/56dB typ. (W/N) 63dB typ. (Digital)
Spurious response	80dB (W/N)	80dB (W/N)
Intermodulation rejection	75dBμV emf (Digital) 78dB typ. (W/N)	80dBμV emf (Digital) 78dB typ. (W/N)
Hum and noise ratio	75dBμV typ. emf (Digital)	75dBμV typ. emf (Digital)
Audio output power	4.0W typ. at 5% distortion with a 4Ω load	
External speaker connector	2-conductor 3.5 (d) mm (1/8")/4Ω	

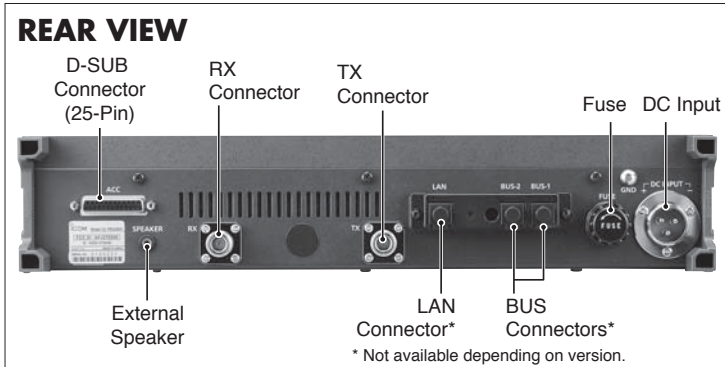

Measurements made in accordance with TIA-603-C (for FM) and EN 301 166 (for Digital). All stated specifications are subject to change without notice or obligation. \* 25kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions. Ask your dealer if you need 25kHz bandwidth.

## OPTIONS

<b>HAND MICROPHONE HM-152</b> 	<b>DESKTOP MICROPHONE SM-26</b> 	<b>EXTERNAL SPEAKERS</b> <b>SP-35:</b> 2m cable <b>SP-35L:</b> 6m cable 
-----------------------------------	-------------------------------------	---

## Applicable U.S. Military Specifications

Standard	MIL 810 G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Humidity	507.5	II
Vibration	514.6	I
Shock	516.6	I

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

### Supplied Accessories

- DC power cable
- Handle kit
- Key assign stickers
- Mounting rack
- Spare fuse

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. IDAS, IDAS logo are trademarks of Icom Incorporated. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. All other trademarks are the properties of their respective holders.

**Icom Inc.** 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 [www.icom.co.jp/world](http://www.icom.co.jp/world)

**Count on us!**

### Icom America Inc.

12421 Willows Road NE,  
Kirkland, WA 98034, U.S.A.  
Phone: +1 (425) 454-8155  
Fax: +1 (425) 454-1509  
E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL: <http://www.icomamerica.com>

### Icom (Europe) GmbH

Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone: +49 (6196) 76685-0  
Fax: +49 (6196) 76685-50  
E-mail: [info@icom-europe.com](mailto:info@icom-europe.com)  
URL: <http://www.icomeurope.com>

### Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejone des Moulinais, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone: +33 (5) 61 36 03 03  
Fax: +33 (5) 61 36 03 00  
E-mail: [icom@icom-france.com](mailto:icom@icom-france.com)  
URL: <http://www.icom-france.com>

### Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899  
Fax: +886 (02) 2559 1874  
E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

### Icom Canada

Glenwood Centre #150-6165  
Highway 17A, Delta, B.C.,  
V4K 5B8, Canada  
Phone: +1 (604) 952-4266  
Fax: +1 (604) 952-0090  
E-mail: [info@icomcanada.com](mailto:info@icomcanada.com)  
URL: <http://www.icomcanada.com>

### Icom Spain S.L.

Ctra. Rubí, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone: +34 (93) 590 26 70  
Fax: +34 (93) 589 04 46  
E-mail: [icom@icomspain.com](mailto:icom@icomspain.com)  
URL: <http://www.icomspain.com>

### Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone: +61 (03) 9549 7500  
Fax: +61 (03) 9549 7505  
E-mail: [sales@icom.net.au](mailto:sales@icom.net.au)  
URL: <http://www.icom.net.au>

### Shanghai Icom Ltd.

No.101, Building 9, Caifuxingyuan Park,  
No.188 Maoting Road, Chedun Town,  
Songjiang District, Shanghai, 201611, China  
Phone: +86 (021) 6153 2768  
Fax: +86 (021) 6765 9987  
E-mail: [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL: <http://www.bjicom.com>

### Icom Brazil

Rua Itororó, 444 Padre Eustáquio  
Belo Horizonte MG,  
CEP: 30720-450, Brazil  
Phone: +55 (31) 3582 8847  
Fax: +55 (31) 3582 8987  
E-mail: [sales@icombrasil.com](mailto:sales@icombrasil.com)

### Icom (UK) Ltd.

Blacksole House, Altira Park,  
Herne Bay, Kent, CT6 6GZ, U.K.  
Phone: +44 (0) 1227 741741  
Fax: +44 (0) 1227 741742  
E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL: <http://www.icomuk.co.uk>

### Icom New Zealand

39C Rennie Drive, Airport Oaks,  
Auckland, New Zealand  
Phone: +64 (09) 274 4062  
Fax: +64 (09) 274 4708  
E-mail: [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL: <http://www.icom.co.nz>