

Product availability : Non-Stock - Not normally stocked in distribution facility



Price* : 720.00 USD



Main

Range of product	Preventa Safety automation
Product or component type	Safety controller with pre-defined function
Safety module name	XPSMP
Safety module application	2 independent functions
Safety use category	Category 4 maximum EN/IEC 60954-1
Type of start	Automatic or unmonitored 1) Automatic or unmonitored 10) Automatic or unmonitored 11) Automatic or unmonitored 14) Automatic or unmonitored 3) Automatic or unmonitored 5) Automatic or unmonitored 7) Monitored 12) Monitored 13) Monitored 15) Monitored 2) Monitored 4) Monitored 6) Monitored 8) Monitored 9)
Checks	Configuration 10) Configuration 13) Configuration 3) Configuration 4) Configuration 5) Configuration 6) Configuration 9)
Standards	EN/IEC 60947-1 + A11 EN/IEC 60947-5-1 EN/IEC 60204-1 DIN V VDE 801 + A1
Product certifications	UL

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

CSA
BIA

[Us] rated supply voltage	24 V DC - 20...20 %
Connections - terminals	Captive screw clamp terminals flexible 0.14...0.75 mm ² without cable end, 2 wires Captive screw clamp terminals solid 0.14...0.75 mm ² without cable end, 2 wires Captive screw clamp terminals flexible 0.14...2.5 mm ² without cable end, 1 wire Captive screw clamp terminals solid 0.14...2.5 mm ² without cable end, 1 wire Captive screw clamp terminals flexible 0.25...1 mm ² with cable end, without bezel, 2 wires Captive screw clamp terminals flexible 0.25...1.5 mm ² with cable end, with bezel, 1 wire Captive screw clamp terminals flexible 0.25...2.5 mm ² with cable end, without bezel, 1 wire Captive screw clamp terminals flexible 0.5...1.5 mm ² with cable end, with double bezel, 2 wires
Safety level	Can reach PL e/category 4 EN/ISO 13849-1 Can reach SIL 3 EN/IEC 62061

Complementary

Function of module	0 functions disabled (factory setting) 1 emergency stop monitoring 1-channel wiring, category 2 10 enabling grip switch monitoring (3-position switch), category 4 11 sensing mat and edges monitoring, category 3 12 sensing mat and edges monitoring, category 3 13 relay output safety light curtain monitoring, category 4 14 coded magnetic switch monitoring, category 4 15 coded magnetic switch monitoring, category 4 2 emergency stop monitoring 1-channel wiring, category 2 3 emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 4 emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 5 emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 6 emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 7 emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 8 emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 9 guard monitoring for injection presses and blowing machines, category 4
Synchronisation time between inputs	0.5 s 13) 1.5 s 14) 1.5 s 15) 1.5 s 5) 1.5 s 6) 1.5 s 9) Unlimited 3) Unlimited 4) Unlimited 7) Unlimited 8)
Maximum power consumption in W	5 W
Input protection type	Internal, electronic
[Uc] control circuit voltage	24 V
Maximum line resistance	100 Ohm <6561.68 ft (2000 m)
Number of safety circuits	3 NO relays per function (6 NO total), volt-free
Number of additional circuits	3 solid state outputs
Breaking capacity	180 VA holding AC-15 C300 relay output 1800 VA inrush AC-15 C300 relay output
Breaking capacity	20 mA 24 V static output circuit 1.5 A 24 V DC-13)50 ms relay output
Output thermal current	2 A for 1 output and 4 A for the other 2 outputs relay 3.3 A for all 3 outputs relay simultaneously 6 A for 1 output and 2 A for the other 2 outputs relay
[Ith] conventional free air thermal current	20 A
Associated fuse rating	4 A gG relay output EN/IEC 60947-5-1, DIN VDE 0660 part 200 6 A fast blow relay output EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA relay output
Minimum output voltage	17 V relay output
Maximum response time on input open	30 ms
[Ui] rated insulation voltage	300 V 2)EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
[Uimp] rated impulse withstand voltage	4 kV III EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
Local signalling	12 LEDs

Mounting support	35 mm symmetrical DIN rail
Depth	4.49 in (114 mm)
Height	3.90 in (99 mm)
Width	1.77 in (45 mm)
Net weight	0.71 lb(US) (0.32 kg)

Environment

IP degree of protection	IP20 terminals) IP40 enclosure)
Ambient air temperature for operation	14...131 °F (-10...55 °C)
Ambient air temperature for storage	-13...185 °F (-25...85 °C)

Ordering and shipping details

Category	22477 - SAFETY MODULES (PREVENTA)
Discount Schedule	SAF2
GTIN	00785901603429
Nbr. of units in pkg.	1
Package weight(Lbs)	0.71 lb(US) (0.32 kg)
Returnability	No
Country of origin	ID

Packing Units

Package 1 Height	0.600 dm
Package 1 width	1.200 dm
Package 1 Length	1.600 dm

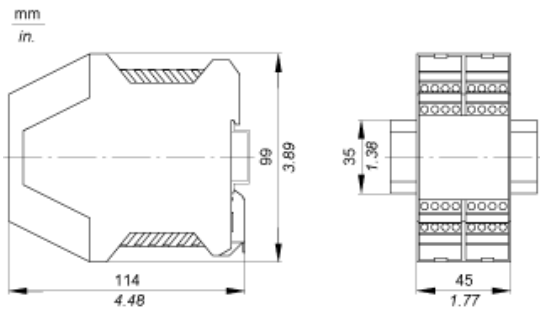
Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions



Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC
[Download XPSAC5121 product datasheet](#)

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet

XPSAC... Safety module for emergency stop and switch monitoring	English 2012-07-04	pdf (29)
---	--------------------	----------

Image of product

Emergency stop and switch monitoring	2010-11-10	(Select :)
--------------------------------------	------------	------------

Certificate







Russian certificate	English 2010-07-07	pdf (60)
---------------------	--------------------	----------

1

2

- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.

Safety Functions

	<ul style="list-style-type: none"> • Emergency stop monitoring, 1 channel wiring: <ul style="list-style-type: none"> ○ 1 channel Emergency stop, automatic or unmonitored start. ○ 1 channel Emergency stop, monitored start. • Emergency stop monitoring, 2 channel wiring: <ul style="list-style-type: none"> ○ 2 channel Emergency stop, automatic or unmonitored start. ○ 2 channel Emergency stop, monitored start.
	<ul style="list-style-type: none"> • Coded magnetic switch monitoring: <ul style="list-style-type: none"> ○ Automatic or unmonitored start, synchronization time = 1,5 s. ○ Monitored start, synchronization time = 1,5 s.
	<ul style="list-style-type: none"> • Guard monitoring with start test: <ul style="list-style-type: none"> ○ Locking of guard with start test, automatic or unmonitored start. ○ Locking of guard with start test, monitored start. • Guard monitoring with start test and synchronization time = 1,5 ms: <ul style="list-style-type: none"> ○ Locking of guard with start test, automatic or unmonitored start. ○ Locking of guard with start test, monitored start. • Guard monitoring for injection press or blowing machine.
	<ul style="list-style-type: none"> • Enabling switch monitoring, safety mat monitoring: <ul style="list-style-type: none"> ○ Enabling switch monitoring, with or without start-up preparation. ○ Safety mat monitoring, automatic or unmonitored start.
	<ul style="list-style-type: none"> • Sensing mat monitoring, monitored start.
	<ul style="list-style-type: none"> • Light curtain monitoring, monitored start, synchronization time = 0,5 s.