



BILL30M



CONTROL PANELS:

BILL30M — BRAINY  
HEADY




## AUTOMATIONS FOR SWINGING GATES LINEAR TELESCOPIC OPERATOR

personalised release key  
up to 2.5 m



### 230 Vac

- Irreversible 230 Vac electromechanical geared motor with easy access release from above
- Neat design and size, particularly suited to forged iron gates
- Easy and quick to install due to compact size and installation dimensions
- Worm protected by a scraper ring and stainless steel stem, suitable for use in dusty and sandy environments or where there are aggressive atmospheric agents.
- Available in right or left version

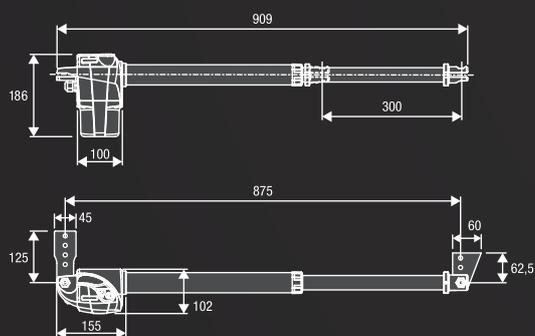


### MEASURES



### COMPLETE KITS


#### **KBILL30M** 9592184

- 2 **BILL30M** 230 Vac Operators
- 1 **HEADY** 230 Vac control unit with integrated receiver
- 1 **PUPILLA.F** Pair of photocells
- 1 **LAMPI.LED** 230 Vac Led flashing light with built-in aerial
- 1 **TOKEY** Metal key selector
- 1 **TO.GO2WV** 433.92 MHz Transmitter





**B.SR**  
9819310  
Multiposition brackets for one operator BILL30M.



**BILL30.CO**  
9253001  
Telescopic stem cover accessory for models BILL30M.



**DU.V96**  
9765035  
12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/external release.



**DU.V90**  
9765030  
12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/external release.



**DU.9990**  
9623010  
Covering plate for DU.V90.



**E.LOCK**  
9765001  
230 Vac vertical electric lock, supplied with counterplate.









**E.LOCKSE**  
9765002  
Extended cylinder for E.LOCK electric lock. It allows to unlock gates up to 55mm-thick from the outside.



**ID.TA**  
9846019  
Warning board.



**ESA BASIC**  
9176108  
System that reduces the electrical energy consumption.



 **MADE IN ITALY**

AUTOMATISMI BENINCA SpA • via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • F +39 0444 759728 • sales@beninca.it

**TECHNICAL DATA**

**BILL30M**

Code	9592100 (R) / 9592101 (L)
Power supply	230 Vac (50-60Hz)
Motor supply	230 Vac
Max absorbed current	1.1 A
Max Thrust	2800 N
Opening time	16"
Operation cycle	30%
Standard stroke	300 mm
Max stroke	320 mm
Protection level	IP54
Operating temperature	-20°C /+50°C
Leaf max dimension	2.5 m
Weight	5.7 kg
<b>Items no. per pallet</b>	<b>66</b>
<b>Kits no. per pallet</b>	<b>32</b>