

HKP & SKP - KNOCK OUT PUNCHERS




Capacity up to 10 tonnes

Spring return hydraulic cylinder

Working pressure 700 Bar


The Hi-Force HKP and SKP knock out puncher range is supplied as a complete set, including all standard sizes of punches/dies as specified below. Ideal for on-site hole punching in electric control panels and metal plates.

Model number	Maximum force tonnes	Plate capacity (mm)		Pump Included	Hose Included	Complete set weight kg
		Stainless steel	Mild steel			
HKP10-2	10	1.6	3.2	HP110	HC2	14.6
HKP10-4	10	1.6	3.2	HP110	HC2	26.1
HKP10-2H	10	1.6	3.2	Not included	Not included	7.0
HKP10-4H	10	1.6	3.2	Not included	Not included	18.5
SKP7	7	1.6	3.2	Self contained unit with integral pump		10.0

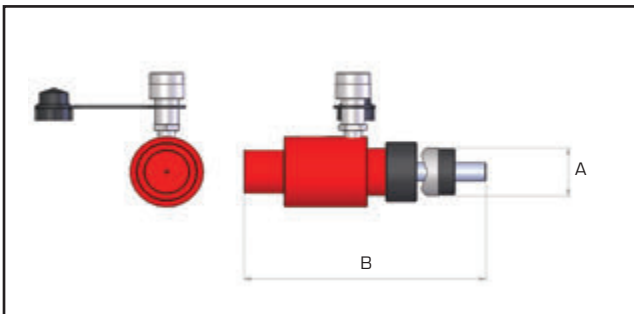

Did you know.....

Hi-Force knock-out punchers are supplied complete with a carrying case

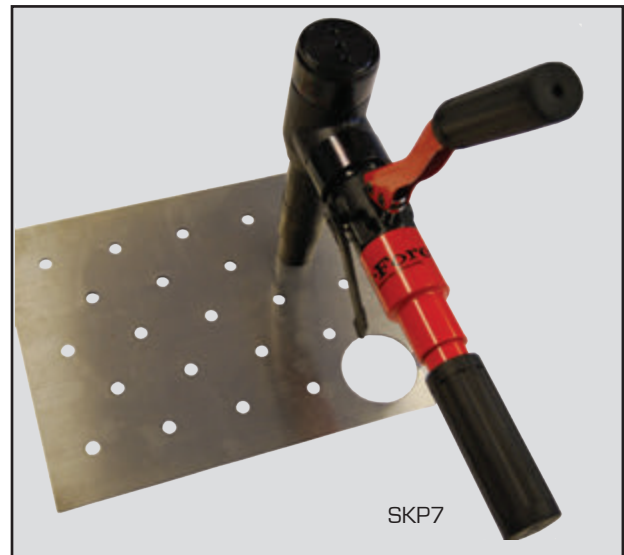

K

Model number	Description	Punches/dies included									
		21.8	27.6	34.1	42.7	48.7	60.5				
HKP10-2	Std.punch/die A	21.8	27.6	34.1	42.7	48.7	60.5				
	Conduit Size	½"	¾"	1"	1¼"	1½"	2"				
	Length B	306	240	240	240	240	240				
HKP10-4	Std.punch/die A	21.8	27.6	34.1	42.7	48.7	60.5	76.1	88.9	102.8	115.5
	Conduit Size	½"	¾"	1"	1¼"	1½"	2"	2½"	3"	3½"	4"
	Length B	306	240	240	240	240	240	253	253	253	253
SKP7	Std.punch/die A	21.8	27.6	34.1	42.7	48.7	60.5				
	Conduit Size	½"	¾"	1"	1¼"	1½"	2"				
	Length B	306	240	240	240	240	240				