

GEMÜ 850

Variable area flowmeter



Features

- Good level of accuracy, simple operation
- Clear and large size printed scale
- ATEX version available as an option
- Over 500 standard scales and 13,000 special scales are available with further scales on request
- Corrosion-resistant plastic parts

Description

The GEMÜ 850 flowmeter operates according to the variable area principle and has a transparent metering tube. The scale printed onto the metering tube is suited to the medium. Dovetail sections moulded onto the metering tube allow for easy mounting of adjustable visual flow indicators, limit switches and a continuous readout transmitter.

Technical specifications

- **Connection types:** Flange | Spigot | Union end
- **Measuring range - Liquids:** 0,1 to 1600 l/h
- **Measuring range - Gases:** 0,02 to 37,5 Nm³/h
- **Error of measurement:** ± 1% of final value and ± 3% of measured value
- **Media temperature:** -20 to 120 °C
- **Operating pressure:** 0 to 15 bar
- **Nominal sizes:** DN 10 to 25
- **Metering tube materials:** PA | PSU | PVC-U, transparent
- **Float materials:** 1.4571 (316 Ti) | PP | PVC-U | PVDF
- **Conformities:** ATEX | EAC

Technical data depends on the respective configuration



Product line GEMÜ 800



GEMÜ 801

GEMÜ 805

GEMÜ 806

GEMÜ 807

GEMÜ 811

| | GEMÜ 801 | GEMÜ 805 | GEMÜ 806 | GEMÜ 807 | GEMÜ 811 |
|--------------------------------|-------------|-------------|----------|-------------|-------------|
| Working medium | | | | | |
| Gases | ● | ● | - | ● | ● |
| Liquids | ● | ● | ● | ● | ● |
| Nominal sizes | DN 20 to 65 | DN 20 to 65 | DN 65 | DN 20 to 65 | DN 20 to 65 |
| Metering tube materials | | | | | |
| PA, transparent | ● | ● | ● | ● | ● |
| PSU | ● | ● | ● | ● | ● |
| PVC-U, transparent | ● | ● | ● | ● | ● |
| Magnet | | | | | |
| No | ● | ● | ● | ● | - |
| Yes | - | - | - | - | ● |
| Float materials | | | | | |
| 1.4571 (316 Ti) | - | - | ● | ● | - |
| PP | - | ● | - | - | - |
| PVC-U | ● | - | - | - | ● |
| Conformities | | | | | |
| EAC | ● | ● | ● | ● | ● |

Product line GEMÜ 800

GEMÜ 815

GEMÜ 816

GEMÜ 817

GEMÜ 820

GEMÜ 822

| Working medium | | | | | |
|--------------------------------|-------------|-------------|-------------|-------------|-------|
| Gases | ● | - | ● | ● | ● |
| Liquids | ● | ● | ● | ● | ● |
| Nominal sizes | DN 20 to 65 | DN 20 to 65 | DN 20 to 65 | DN 20 to 50 | DN 50 |
| Metering tube materials | | | | | |
| PA, transparent | ● | ● | ● | ● | ● |
| PSU | ● | ● | ● | ● | ● |
| PVC-U, transparent | ● | ● | ● | ● | ● |
| Magnet | | | | | |
| No | - | - | - | ● | ● |
| Yes | ● | ● | ● | - | - |
| Float materials | | | | | |
| 1.4571 (316 Ti) | - | ● | ● | - | - |
| PP | ● | - | - | - | - |
| PVDF | - | - | - | ● | ● |
| Conformities | | | | | |
| EAC | ● | ● | ● | - | - |

Product line GEMÜ 800



| | GEMÜ 825 | GEMÜ 830 | GEMÜ 831 | GEMÜ 832 | GEMÜ 835 |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|
| Working medium | | | | | |
| Gases | ● | ● | ● | ● | ● |
| Liquids | - | ● | ● | ● | ● |
| Nominal sizes | DN 20 to 65 | DN 20 to 50 | DN 20 to 65 | DN 20 to 65 | DN 20 to 65 |
| Metering tube materials | | | | | |
| PA, transparent | ● | ● | ● | ● | ● |
| PSU | ● | ● | ● | ● | ● |
| PVC-U, transparent | ● | ● | ● | ● | ● |
| Magnet | | | | | |
| No | ● | - | - | - | - |
| Yes | - | ● | ● | ● | ● |
| Float materials | | | | | |
| PP | ● | - | - | - | ● |
| PVC-U | - | - | ● | - | - |
| PVDF | - | ● | - | ● | - |
| Conformities | | | | | |
| EAC | ● | ● | - | ● | ● |

Product line GEMÜ 850

| | GEMÜ 851 | GEMÜ 855 | GEMÜ 857 | GEMÜ 861 | GEMÜ 865 |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|
| Working medium | | | | | |
| Gases | ● | ● | ● | ● | ● |
| Liquids | ● | ● | ● | ● | ● |
| Nominal sizes | DN 15 to 25 | DN 10 to 25 | DN 10 to 25 | DN 10 to 25 | DN 10 to 25 |
| Metering tube materials | | | | | |
| PA, transparent | ● | ● | ● | ● | ● |
| PSU | ● | ● | ● | ● | ● |
| PVC-U, transparent | ● | ● | ● | ● | ● |
| PVDF | ● | ● | ● | ● | ● |
| Magnet | | | | | |
| No | ● | ● | ● | - | - |
| Yes | - | - | - | ● | ● |
| Float materials | | | | | |
| 1.4571 (316 Ti) | - | - | ● | - | - |
| PP | - | ● | - | - | ● |
| PVC-U | ● | - | - | ● | - |
| Conformities | | | | | |
| EAC | ● | ● | ● | ● | ● |

Product line GEMÜ 850



| | GEMÜ 867 | GEMÜ 870 | GEMÜ 875 | GEMÜ 880 | GEMÜ 885 |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|
| Working medium | | | | | |
| Gases | ● | ● | ● | ● | ● |
| Liquids | ● | ● | - | ● | ● |
| Nominal sizes | DN 10 to 25 | DN 10 to 25 | DN 10 to 25 | DN 10 to 25 | DN 20 to 25 |
| Metering tube materials | | | | | |
| PA, transparent | ● | ● | ● | ● | ● |
| PSU | ● | ● | ● | ● | ● |
| PVC-U, transparent | ● | ● | ● | ● | ● |
| Magnet | | | | | |
| No | - | ● | ● | - | - |
| Yes | ● | - | - | ● | ● |
| Float materials | | | | | |
| 1.4571 (316 Ti) | ● | - | - | - | - |
| PP | - | - | ● | - | ● |
| PVDF | - | ● | - | ● | - |
| Conformities | | | | | |
| EAC | ● | ● | ● | ● | ● |

Product line GEMÜ 800 HP**GEMÜ 823
PurePlus****GEMÜ 833
PurePlus**

| Working medium | | |
|--------------------------------|-------|-------------|
| Gases | ● | ● |
| Liquids | ● | ● |
| Nominal sizes | DN 32 | DN 15 to 32 |
| Metering tube materials | | |
| PVDF | ● | ● |
| Magnet | | |
| No | ● | - |
| Yes | - | ● |
| Float materials | | |
| PVDF | ● | ● |
| Conformities | | |

Product line GEMÜ 850 HP




| | GEMÜ 873 PurePlus | GEMÜ 883 PurePlus |
|--------------------------------|----------------------|----------------------|
| Working medium | | |
| Gases | ● | ● |
| Liquids | ● | ● |
| Nominal sizes | DN 15 to 25 | DN 15 to 25 |
| Metering tube materials | | |
| PVDF | ● | ● |
| Magnet | | |
| No | ● | - |
| Yes | - | ● |
| Float materials | | |
| PVDF | ● | ● |
| Conformities | | |
| EAC | ● | ● |

Product line GEMÜ 840**GEMÜ 840****GEMÜ 841****GEMÜ 845****GEMÜ 846**

| | GEMÜ 840 | GEMÜ 841 | GEMÜ 845 | GEMÜ 846 |
|---|-----------------|-----------------|-----------------|-----------------|
| Working medium | | | | |
| Water | ● | ● | ● | ● |
| Nominal size | DN 65 | DN 65 | DN 65 | DN 65 |
| Metering tube materials Main flow unit | | | | |
| PP | - | - | ● | ● |
| PVC-U | ● | ● | - | - |
| Magnet | | | | |
| No | ● | - | ● | - |
| Yes | - | ● | - | ● |
| Float materials | | | | |
| PP | ● | - | ● | ● |
| PVC-U | ● | ● | - | - |
| Conformities | | | | |
| EAC | ● | ● | ● | ● |

Product description

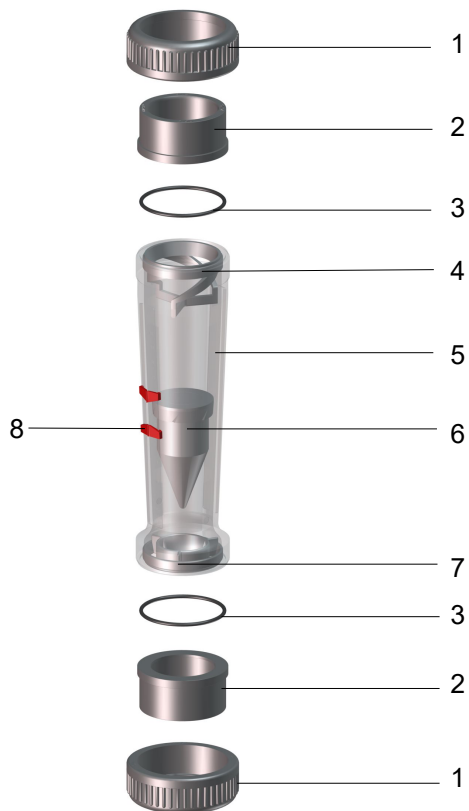

| Item | Name | Materials |
|------|------------------|--|
| 1 | Union nut | PP, PVDF, stainless steel |
| 2 | Union (insert) | PVC-C, PP, PVDF, 1.4408, 1.4435, 1.4404, malleable iron |
| 3 | O-ring | FPM, EPDM, FEP encapsulated |
| 4 | Upper float stop | PP, PVDF |
| 5 | Metering tube | PA transparent / Polysulphone (working medium air, water and sodium hydroxide) Polysulphone (working medium hydrochloric acid) PVC-U (working medium air) PVDF on request |
| 6 | Float | PVDF, PP, PVC, stainless steel |
| 7 | Lower float stop | PP, PVDF |
| 8 | Flow indicator | |

GEMÜ CONEXO

The interaction of valve components that are equipped with RFID chips and an associated IT infrastructure actively increase process reliability.



Thanks to serialization, every valve and every relevant valve component such as the body, actuator or diaphragm, and even automation components, can be clearly traced and read using the CONEXO pen RFID reader. The CONEXO app, which can be installed on mobile devices, not only facilitates and improves the "installation qualification" process, but also makes the maintenance process much more transparent and easier to document. The app actively guides the maintenance technician through the maintenance schedule and directly provides him with all the information assigned to the valve, such as test reports, testing documentation and maintenance histories. The CONEXO portal acts as a central element, helping to collect, manage and process all data.

For further information on GEMÜ CONEXO please visit:


www.gemu-group.com/conexo

Ordering

GEMÜ Conexo must be ordered separately with the ordering option "CONEXO" (see order data).

In the corresponding design with CONEXO, this product has an RFID chip (1) for electronic recognition. The position of the RFID chip can be seen below.

Installing the RFID chip

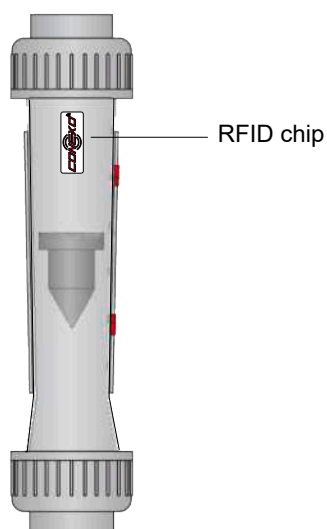

Availability

| DN | Union material (code) ¹⁾ | | | | | | | | | | | | | | | | | | | | | |
|-----------|--------------------------------------|---|----|----|----|---|---|----|----|----|---|--------------------------|----|------------|----|---|----|----|----|----|----|----|
| | 1 | | | | | 5 | | | | 6 | 7 | 1, 6, 7, 1V, 2V | 20 | 41, 1V, 2V | | | | | | | | |
| | Connection type (code) ²⁾ | | | | | | | | | | | | | | | | | | | | | |
| | 4 | 7 | 7R | 33 | 39 | 4 | 7 | 39 | 78 | 7R | 8 | 39 | 7R | 7 | 78 | 0 | 16 | 17 | 18 | 37 | 59 | 60 |
| 10 | X | X | X | X | - | - | X | - | - | X | - | - | X | X | - | - | X | X | X | - | X | X |
| 15 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | - | X | X |
| 20 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | - | X | X |
| 25 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |

1) Union material

- Code 1: Insert PVC-U, union nut PP grey
- Code 1V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PP beige union nut
- Code 20: Insert PVDF, union nut PVDF
- Code 2V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PVDF union nut
- Code 41: Insert 1.4435 (butt weld spigot), union nut stainless steel
- Code 5: Insert PP, union nut PP beige
- Code 6: Malleable iron
- Code 7: Insert 1.4404 (RP threaded socket), union nut stainless steel
- Code 4: Plastic-loose backing flange, flange EN 1092, PN 10, form B
- Code 8: Flange EN 1092, PN 16, form B
- Code 39: Flange ANSI Class 125/150 RF

2) Connection type

- Code 0: Spigot DIN
- Code 16: Spigot EN 10357 series B, formerly DIN 11850 series 1
- Code 17: Spigot EN 10357 series A (formerly DIN 11850 series 2)
- Code 18: Spigot DIN 11850 series 3
- Code 37: Spigot SMS 3008
- Code 59: Spigot ASME BPE
- Code 60: Spigot ISO 1127/EN 10357 series C
- Code 33: Union end with inch insert - BS (socket)
- Code 7: Union end with DIN insert (socket)
- Code 78: Union end with DIN insert (for IR butt welding)
- Code 7R: Union end with Rp threaded socket insert
- Code 4: Plastic-loose backing flange, flange EN 1092, PN 10, form B
- Code 8: Flange EN 1092, PN 16, form B
- Code 39: Flange ANSI Class 125/150 RF

Selection of scales

All scales in this datasheet are based on a medium temperature of 20 °C.

Scales in % (10 - 100)

Accuracy class: 4 acc. to VDE/VDI 3513, sheet 2, i.e. $\pm 1\%$ of end value and $\pm 3\%$ of measured value.

The scale divisions correspond to the actual flows.

When ordering, the flow ranges should be stated as follows:

Liquid media: l/h

Gaseous media: Nm³/h

Flowmeters for liquid media, types 851, 855, 861, 865

Order code - Types 851¹⁾, 855¹⁾, 861¹⁾, 865¹⁾

| DN | Metering tube size code | Water | Hydrochloric acid | Sodium hydroxide | | |
|----|-------------------------|--|---------------------------------|--|-------------|--------------|
| | | H ₂ O | HCl 30-33 % | NaOH 30 % | NaOH 45 % | NaOH 50 % |
| | | Metering tube material | | | | |
| | | PVC-U (code 3) PA (code 21), PSU (code 22) | PVC-U (code 3) PSU (code 22) | PVC-U (code 3) PA (code 21), PSU (code 22) | | |
| 10 | 11 | 2 - 25 | 1 - 20 | 0.25 - 3.75 | 0.05 - 0.85 | 0.025 - 0.60 |
| | 12 | 2 - 40 | 2 - 32 | 0.50 - 8.00 | 0.10 - 2.00 | 0.05 - 1.45 |
| | 13 | 5 - 60 | 2 - 54 | 1.00 - 20.0 | 0.25 - 4.75 | 0.25 - 3.25 |
| | 14 | 10 - 100 | 5 - 90 | 2.50 - 45.0 | 0.50 - 12.5 | 0.50 - 9.00 |
| | 15 | 15 - 160 | 10 - 150 | 5.00 - 80.0 | 1.00 - 30.0 | 1.00 - 22.0 |
| 15 | 21 | 5 - 60 | 2.5 - 50 | 1.0 - 15.0 | 0.25 - 3.25 | 0.10 - 2.40 |
| | 22 | 10 - 100 | 5.0 - 80 | 2.0 - 34.0 | 0.50 - 8.00 | 0.25 - 5.50 |
| | 23 | 15 - 160 | 10 - 130 | 2.5 - 67.5 | 1.00 - 8.00 | 0.50 - 13.5 |
| | 24 | 20 - 250 | 20 - 220 | 5.0 - 130 | 2.50 - 45.0 | 2.00 - 32.0 |
| | 25 | 30 - 320 | 20 - 260 | 10.0 - 170 | 2.50 - 65.0 | 2.50 - 47.5 |
| 20 | 31 | 10 - 160 | 10 - 135 | 2.5 - 62.5 | 1.0 - 15.0 | 0.5 - 11 |
| | 32 | 20 - 250 | 20 - 210 | 5.0 - 115.0 | 2.0 - 32.5 | 1.0 - 24 |
| | 33 | 40 - 400 | 25 - 325 | 10 - 190.0 | 2.5 - 70.0 | 2.5 - 50 |
| | 34 | 40 - 640 | 50 - 550 | 25 - 375.0 | 10.0 - 180 | 5.0 - 130 |
| 25 | 41 | 20 - 250 | 20 - 200 | 5 - 110 | 2.0 - 29 | 1.0 - 20 |
| | 42 | 40 - 400 | 30 - 340 | 10 - 200 | 2.5 - 70 | 2.5 - 50 |
| | 43 | 60 - 640 | 50 - 550 | 20 - 380 | 10 - 150 | 5 - 120 |
| | 44 | 100 - 1000 | 100 - 900 | 25 - 650 | 25 - 350 | 10 - 260 |

Unit in l/h

1) Type

Code 851: Variable area flowmeter, PVC float, (series 850)

Code 855: Variable area flowmeter, PP float, (series 850)

Code 861: Variable area flowmeter, PVC float with magnet, (series 850)

Code 865: Variable area flowmeter, PP float with magnet, (series 850)

Flowmeters for liquid media, types 857, 867Order code - Types 857¹⁾, 867¹⁾

| DN | Metering tube size code | Water | Hydrochloric acid | Sodium hydroxide | | |
|-----------|-------------------------|--|---------------------------------|--|------------|-------------|
| | | H ₂ O | HCl 30-33 % | NaOH 30 % | NaOH 45 % | NaOH 50 % |
| | | Metering tube material | | | | |
| | | PVC-U (code 3) PA (code 21), PSU (code 22) | PVC-U (code 3) PSU (code 22) | PVC-U (code 3) PA (code 21), PSU (code 22) | | |
| 10 | 11 | 4 - 40 | - | 0.5 - 8.5 | 0.10 - 2.0 | 0.05 - 1.40 |
| | 12 | 5 - 60 | - | 1.0 - 19.0 | 0.25 - 4.5 | 0.25 - 3.25 |
| | 13 | 10 - 100 | - | 2.5 - 40.0 | 0.50 - 11 | 0.5 - 8.00 |
| | 14 | 15 - 160 | - | 5.0 - 85.0 | 1.00 - 28 | 1.0 - 21.0 |
| | 15 | 20 - 250 | - | 10.0 - 150 | 2.50 - 60 | 2.5 - 47.5 |
| 15 | 21 | 10 - 100 | - | 2.5 - 37.5 | 0.5 - 9.0 | 0.25 - 6.5 |
| | 22 | 20 - 160 | - | 5.0 - 75.0 | 1.0 - 22 | 1.00 - 15 |
| | 23 | 20 - 250 | - | 5.0 - 140 | 2.5 - 50 | 2.00 - 36 |
| | 24 | 40 - 400 | - | 10.0 - 250 | 5.0 - 110 | 5.00 - 85 |
| | 25 | 50 - 500 | - | 20.0 - 300 | 10 - 160 | 5.00 - 120 |
| 20 | 31 | 20 - 250 | - | 5 - 135 | 2.5 - 42.5 | 2.0 - 30 |
| | 32 | 30 - 400 | - | 10 - 230 | 5.0 - 90.0 | 2.5 - 65 |
| | 33 | 60 - 600 | - | 25 - 350 | 10 - 180 | 5.0 - 135 |
| | 34 | 100 - 1000 | - | 25 - 650 | 25 - 400 | 20 - 320 |
| 25 | 41 | 40 - 400 | - | 10 - 220 | 5.0 - 75 | 2.5 - 55 |
| | 42 | 50 - 650 | - | 20 - 380 | 10 - 180 | 5 - 135 |
| | 43 | 100 - 1000 | - | 25 - 650 | 25 - 400 | 20 - 300 |
| | 44 | 150 - 1600 | - | 50 - 1100 | 50 - 750 | 25 - 650 |

Unit in l/h

1) **Type**

Code 857: Variable area flowmeter, 1.4571 (316Ti) stainless steel float, (series 850)

Code 867: Variable area flowmeter, 1.4571 (316Ti) stainless steel float with magnet, (series 850)

Flowmeters for liquid media, types 870, 880

Order code - Types 870¹⁾, 880¹⁾

| DN | Metering tube size code | Water | Hydrochloric acid | Sodium hydroxide | | |
|----|-------------------------|--|---------------------------------|--|-----------|-----------|
| | | H ₂ O | HCl 30-33 % | NaOH 30 % | NaOH 45 % | NaOH 50 % |
| | | Metering tube material | | | | |
| | | PVC-U (code 3) PA (code 21), PSU (code 22) | PVC-U (code 3) PSU (code 22) | PVC-U (code 3) PA (code 21), PSU (code 22) | | |
| 10 | 11 | 2 - 25 | 1 - 20 | - | - | - |
| | 12 | 2 - 40 | 2 - 32 | - | - | - |
| | 13 | 5 - 60 | 2 - 54 | - | - | - |
| | 14 | 10 - 100 | 5 - 90 | - | - | - |
| | 15 | 15 - 160 | 10 - 150 | - | - | - |
| 15 | 21 | 5 - 60 | 2.5 - 50 | - | - | - |
| | 22 | 10 - 100 | 5.0 - 80 | - | - | - |
| | 23 | 15 - 160 | 10 - 130 | - | - | - |
| | 24 | 20 - 250 | 20 - 220 | - | - | - |
| | 25 | 30 - 320 | 20 - 260 | - | - | - |
| 20 | 31 | 10 - 160 | 10 - 135 | - | - | - |
| | 32 | 20 - 250 | 20 - 210 | - | - | - |
| | 33 | 40 - 400 | 25 - 325 | - | - | - |
| | 34 | 40 - 640 | 50 - 550 | - | - | - |
| 25 | 41 | 20 - 250 | 20 - 200 | - | - | - |
| | 42 | 40 - 400 | 30 - 340 | - | - | - |
| | 43 | 60 - 640 | 50 - 550 | - | - | - |
| | 44 | 100 - 1000 | 100 - 900 | - | - | - |

Unit in l/h

1) Type

Code 870: Variable area flowmeter, PVDF float, (series 850)

Code 880: Variable area flowmeter, PVDF float with magnet, (series 850)

Flowmeter for gaseous media, type 875

Caution! With gaseous media the scaling alters according to operating pressure. Please state when ordering.

Standard conditions to DIN 1343

Order code - Type 875¹⁾

| DN | Metering tube size | Medium air |
|----|--------------------|--------------------------------|
| | | Metering tube material |
| | | PA (code 21), PSU (code 22) |
| 10 | 11 | 0.02 - 0.36 |
| | 12 | 0.05 - 0.55 |
| | 13 | 0.10 - 0.90 |
| | 14 | 0.15 - 1.50 |
| | 15 | 0.20 - 2.40 |
| 15 | 21 | 0.10 - 0.90 |
| | 22 | 0.15 - 1.50 |

Selection of scales

| DN | Metering tube size | Medium air |
|-----------|--------------------|--------------------------------|
| | | Metering tube material |
| | | PA (code 21), PSU (code 22) |
| | 23 | 0.20 - 2.40 |
| | 24 | 0.40 - 3.80 |
| | 25 | 0.40 - 4.80 |
| 20 | 31 | 0.20 - 2.50 |
| | 32 | 0.25 - 3.75 |
| | 33 | 0.50 - 5.50 |
| | 34 | 1.00 - 10.0 |
| 25 | 41 | 0.4 - 4.00 |
| | 42 | 0.5 - 6.00 |
| | 43 | 1.0 - 10.0 |
| | 44 | 1.0 - 16.0 |

Unit in l/h

1) **Type**

Code 875: Variable area flowmeter, PP float, (series 850)

Flowmeter for gaseous media, type 885

Caution! With gaseous media the scaling alters according to operating pressure. Please state when ordering.

Standard conditions to DIN 1343

Order code - Type 885¹⁾

| DN | Metering tube size | Medium air |
|-----------|--------------------|--------------------------------|
| | | Metering tube material |
| | | PA (code 21), PSU (code 22) |
| 20 | 31 | 0.75 - 6.5 |
| | 32 | 1.0 - 10.0 |
| | 33 | 1.5 - 14.5 |
| | 34 | 2.0 - 24.0 |
| 25 | 41 | 1.0 - 10.0 |
| | 42 | 2.0 - 16.0 |
| | 43 | 3.0 - 24.0 |
| | 44 | 5.0 - 37.5 |

Unit in l/h

1) **Type**

Code 885: Variable area flowmeter, PP float with magnet, (series 850)

Order data

The order data provide an overview of standard configurations.

Please check the availability before ordering. Other configurations available on request.

The following data are necessary:

1. Type of medium
2. Concentration of medium (%)
3. Required flow range (l/h, m³/h, kg/h)
4. Operating pressure, relative or absolute (bar)
5. Temperature of medium (°C)
6. Viscosity of medium
7. Medium density
8. Float with or without magnet

Order codes

| 1 Type | Code |
|---|------|
| Variable area flowmeter, PVC float, (series 850) | 851 |
| Variable area flowmeter, PP float, (series 850) | 855 |
| Variable area flowmeter, 1.4571 (316Ti) stainless steel float, (series 850) | 857 |
| Variable area flowmeter, PVC float with magnet, (series 850) | 861 |
| Variable area flowmeter, PP float with magnet, (series 850) | 865 |
| Variable area flowmeter, 1.4571 (316Ti) stainless steel float with magnet, (series 850) | 867 |
| Variable area flowmeter, PVDF float, (series 850) | 870 |
| Variable area flowmeter, PP float, (series 850) | 875 |
| Variable area flowmeter, PVDF float with magnet, (series 850) | 880 |
| Variable area flowmeter, PP float with magnet, (series 850) | 885 |
| 2 RoHS conformance | Code |
| Conformance to RoHS | R |
| 3 DN | Code |
| DN 10 | 10 |
| DN 15 | 15 |
| DN 20 | 20 |
| DN 25 | 25 |

| 4 Body configuration | Code |
|---|------|
| Straight through pipe | D |
| 5 Connection type | Code |
| Union end with DIN insert (socket) | 7 |
| Union end with inch insert - BS (socket) | 33 |
| Union end with DIN insert (for IR butt welding) | 78 |
| Union end with Rp threaded socket insert | 7R |
| Spigot DIN | 0 |
| Spigot EN 10357 series B, formerly DIN 11850 series 1 | 16 |
| Spigot EN 10357 series A (formerly DIN 11850 series 2) | 17 |
| Spigot DIN 11850 series 3 | 18 |
| Spigot SMS 3008 | 37 |
| Spigot ASME BPE | 59 |
| Spigot ISO 1127/EN 10357 series C | 60 |
| Plastic-loose backing flange, flange EN 1092, PN 10, form B | 4 |
| Flange EN 1092, PN 16, form B | 8 |
| Flange ANSI Class 125/150 RF | 39 |
| 6 Metering tube material | Code |
| PVC-U, transparent | 3 |
| PVDF | 20 |
| PA, transparent | 21 |
| PSU | 22 |
| 7 O-ring material | Code |
| FPM | 4 |
| EPDM | 14 |
| FEP encapsulated | 55 |
| 8 Union material | Code |
| Insert PVC-U, union nut PP grey | 1 |
| Insert PP, union nut PP beige | 5 |
| Malleable iron | 6 |

Order data

| 8 Continuation of Union material | Code |
|--|------|
| Insert 1.4404 (Rp threaded socket), union nut stainless steel | 7 |
| Insert PVDF, union nut PVDF | 20 |
| Insert 1.4435 (butt weld spigot), union nut stainless steel | 41 |
| Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PP beige union nut | 1V |
| Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PVDF union nut | 2V |

| 9 Metering tube size | Code |
|----------------------|------|
| See table | |

| 10 Measuring range | Code |
|--------------------|------|
| See table | |

| 11 CONEXO | Code |
|---|------|
| Without | |
| Integrated RFID chip for electronic identification and traceability | C |

Order example

| Ordering option | Code | Description |
|--------------------------|------|---|
| 1 Type | 855 | Variable area flowmeter, PP float, (series 850) |
| 2 RoHS conformance | R | Conformance to RoHS |
| 3 DN | 10 | DN 10 |
| 4 Body configuration | D | Straight through pipe |
| 5 Connection type | 7 | Union end with DIN insert (socket) |
| 6 Metering tube material | 21 | PA, transparent |
| 7 O-ring material | 14 | EPDM |
| 8 Union material | 1 | Insert PVC-U, union nut PP grey |
| 9 Metering tube size | | See table |
| 10 Measuring range | | See table |
| 11 CONEXO | | Without |

Technical data

Medium

Working medium: Corrosive and inert gaseous and liquid media which have no negative impact on the physical and chemical properties of the metering tube, float, seal and union materials as well as other media wetted parts.

Temperature

Storage temperature: 0 – 40 °C

Media temperature: -20 – 120 °C

Pressure

Operating pressure: Metering tubes with plastic unions: Max. 10 bar
 Metering tubes with metal unions: Max. 15 bar

Pressure loss:

| DN | Type Code | | | | |
|----|-----------|-------------------------|----------|-----|-----|
| | 851 | 855, 861, 865, 870, 880 | 857, 867 | 875 | 885 |
| 10 | - | 5 | 10 | 1 | - |
| 15 | 6 | 6 | 12 | 1.5 | - |
| 20 | 8 | 8 | 17 | 2 | 11 |
| 25 | 10 | 10 | 19 | 2.5 | 13 |

Pressures in mbar
 Medium: Water, 20 °C

Pressure/temperature correlation

| Metering tube material code ¹⁾ | Union material code ²⁾ | Temperature | | | | | | | | | | | | | | | | | |
|---|-----------------------------------|--------------------------------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|--|
| | | -20 | -10 | ±0 | 5 | 10 | 20 | 25 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 | |
| | | Permissible operating pressure | | | | | | | | | | | | | | | | | |
| 3 | 1 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.0 | 6.0 | 3.5 | - | - | - | - | - | - | - | |
| | 6 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.0 | 6.0 | 3.5 | - | - | - | - | - | - | - | |
| | 7 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.0 | 6.0 | 3.5 | - | - | - | - | - | - | - | |
| | 1V | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.0 | 6.0 | 3.5 | - | - | - | - | - | - | - | |
| 20 | 20 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 9.0 | 8.0 | 7.1 | 6.3 | 5.4 | 4.7 | 3.6 | 2.5 | 1.7 | 1.2 | |
| | 7/41 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 9.0 | 8.0 | 7.1 | 6.3 | 5.4 | 4.7 | 3.6 | 2.5 | 1.7 | 1.2 | |
| | 2V | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 9.0 | 8.0 | 7.1 | 6.3 | 5.4 | 4.7 | 3.6 | 2.5 | 1.7 | 1.2 | |
| 21 | 1 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.0 | 6.0 | 3.5 | 1.5 | - | - | - | - | - | - | |
| | 5 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.5 | 7.0 | 5.5 | 4.0 | - | - | - | - | - | - | |
| | 20 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 9.0 | 8.0 | 7.1 | 6.3 | - | - | - | - | - | - | |
| | 6 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 13.5 | 12.0 | 10.7 | 9.5 | - | - | - | - | - | - | |
| | 7/41 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 15.0 | 13.5 | 12.0 | 10.7 | 9.5 | - | - | - | - | - | - | |
| | 1V | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.5 | 7.0 | 5.5 | 4.0 | - | - | - | - | - | - | |

Technical data

| Metering tube material code ¹⁾ | Union material code ²⁾ | Temperature | | | | | | | | | | | | | | | | |
|---|-----------------------------------|--------------------------------|-----|----|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|
| | | -20 | -10 | ±0 | 5 | 10 | 20 | 25 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 |
| | | Permissible operating pressure | | | | | | | | | | | | | | | | |
| 22 | 1V | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.5 | 7.0 | 5.5 | 4.0 | 2.7 | 1.5 | 0.8 | - | - | - |
| | 1 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.0 | 6.0 | 3.5 | 1.5 | - | - | - | - | - | - |
| | 5 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 8.5 | 7.0 | 5.5 | 4.0 | 2.7 | 1.5 | 0.8 | - | - | - |
| | 20 | - | - | - | 10.0 | 10.0 | 10.0 | 10.0 | 9.0 | 8.0 | 7.1 | 6.3 | 5.4 | 4.7 | 3.6 | 2.5 | - | - |
| | 6 | - | - | - | 15.0 | 15.0 | 15.0 | 15.0 | 14.0 | 13.0 | 12.0 | 11.0 | 9.7 | 8.5 | 7.7 | 6.0 | - | - |
| | 7/41 | - | - | - | 15.0 | 15.0 | 15.0 | 15.0 | 14.0 | 13.0 | 12.0 | 11.0 | 9.7 | 8.5 | 7.7 | 6.0 | - | - |

Temperatures in °C

Permissible operating pressure in bar

For flowmeters that have a permanent magnet in the float, the max. temperature is 80 °C.

1) Metering tube material

Code 3: PVC-U, transparent

Code 20: PVDF

Code 21: PA, transparent

Code 22: PSU

2) Union material

Code 1: Insert PVC-U, union nut PP grey

Code 1V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PP beige union nut

Code 20: Insert PVDF, union nut PVDF

Code 2V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PVDF union nut

Code 41: Insert 1.4435 (butt weld spigot), union nut stainless steel

Code 5: Insert PP, union nut PP beige

Code 6: Malleable iron

Code 7: Insert 1.4404 (RP threaded socket), union nut stainless steel

Mechanical data

Weight:


| DN | Metering tube size code | For liquid media | | | | For gaseous media | |
|-----------|---------------------------|------------------------------|----------------|----------|----------------|-------------------|----------------|
| | | Type | | | | | |
| | | 851, 855, 861, 865, 870, 880 | | 857, 867 | | 875, 885 | |
| | | Union material | | | | | |
| | | PVC-U | Malleable iron | PVC-U | Malleable iron | PVC-U | Malleable iron |
| 10 | 11, 12, 13, 14, 15 | 0.07 | 0.18 | 0.08 | 0.19 | 0.07 | 0.18 |
| 15 | 21, 22, 23, 24, 25 | 0.12 | 0.3 | 0.13 | 0.31 | 0.11 | 0.29 |
| 20 | 31, 32, 33, 34, | 0.21 | 0.48 | 0.24 | 0.51 | 0.19 | 0.46 |
| 40 | 41, 42, 43, 44 | 0.29 | 0.61 | 0.34 | 0.66 | 0.25 | 0.57 |

Weights in kg

Dimensions

Plastic union

Union end with DIN insert, inch-BS (socket)

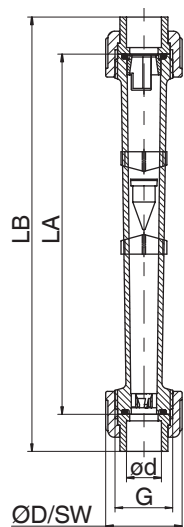

| DN | Connection type code ¹⁾ | | | | | | | | | | |
|-----------|------------------------------------|-------|------------|---------|-------|-------|-------|-------|------|----------|---|
| | 7, 33 | | | | 7 | 33 | 7 | | | 33 | 7 |
| | Union material code ²⁾ | | | | | | | | | | |
| | 1, 5, 20 | | | | 1 | | 5 | 20 | 1 | 1, 5, 20 | |
| | G | LA | O-ring | øD / SW | LB | | | | ød | | |
| 10 | G 3/4 | 165.0 | 15.5 x 2.6 | 35.0 | 199.0 | 209.0 | 199.0 | 199.0 | 17.3 | 16.0 | |
| 15 | G 1 | 170.0 | 20.2 x 3.5 | 43.0 | 208.0 | 208.0 | 205.0 | 108.0 | 21.4 | 20.0 | |
| 20 | G 1¼ | 185.0 | 28.0 x 3.5 | 53.0 | 229.0 | 229.0 | 223.0 | 227.0 | 26.7 | 25.0 | |
| 25 | G 1½ | 200.0 | 33.0 x 3.5 | 60.0 | 250.0 | 250.0 | 242.0 | 246.0 | 33.6 | 32.0 | |

Dimensions in mm

Dimension L of metering tube material PVDF (code 20) reduced by 3 mm.

1) Connection type

Code 7: Union end with DIN insert (socket)

Code 33: Union end with inch insert - BS (socket)


2) Union material

Code 1: Insert PVC-U, union nut PP grey

Code 5: Insert PP, union nut PP beige

Code 20: Insert PVDF, union nut PVDF

Union end with DIN insert (butt welding, IR)

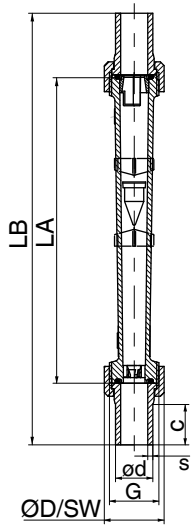

| DN | Connection type code 78 ¹⁾ | | | | | | | | |
|----|---------------------------------------|-------|------------|---------|------|-------|------|-----|-----|
| | Union material code ²⁾ | | | | | | | | |
| | 5, 20 | | | | | | | 5 | 20 |
| | G | LA | O-ring | øD / SW | c | LB | ød | s | |
| 10 | G 3/4 | 165.0 | 15.5 x 2.6 | 35.0 | - | - | - | - | - |
| 15 | G 1 | 170.0 | 20.2 x 3.5 | 43.0 | 37.0 | 276.0 | 20.0 | 1.9 | 1.9 |
| 20 | G 1¼ | 185.0 | 28.0 x 3.5 | 53.0 | 39.0 | 297.0 | 25.0 | 2.3 | 1.9 |
| 25 | G 1½ | 200.0 | 33.0 x 3.5 | 60.0 | 40.0 | 318.0 | 32.0 | 2.9 | 2.4 |

Dimensions in mm

Dimension L of metering tube material PVDF (code 20) reduced by 3 mm.

1) **Connection type**

Code 78: Union end with DIN insert (for IR butt welding)


2) **Union material**

Code 5: Insert PP, union nut PP beige

Code 20: Insert PVDF, union nut PVDF

Metal and plastic union

Union end with Rp threaded socket insert

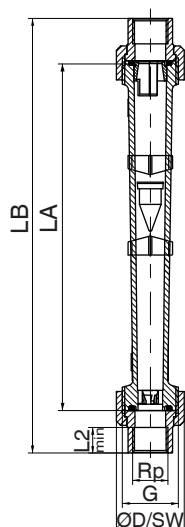

| DN | Connection type code 7R ¹⁾ | | | | | | | | | | |
|-----------|---------------------------------------|-------|-----------------|--------|--------|---------|------|-------|-------|-----------|------|
| | Union material code ²⁾ | | | | | | | | | | |
| | 1, 6, 7 | | 1, 6, 7, 1V, 2V | | 6, 7 | | 1 | 6 | 7 | 1, 1V, 2V | |
| | G | LA | O-ring | Rp | L2 min | øD / SW | | LB | | | ød |
| 10 | G 3/4 | 165.0 | 15.5 x 2.6 | RP 3/8 | 11.4 | 32.0 | 32.0 | 213.0 | 209.0 | 203.0 | 35.0 |
| 15 | G 1 | 170.0 | 20.2 x 3.5 | RP 1/2 | 15.0 | 41.0 | 41.0 | 222.0 | 214.0 | 212.0 | 43.0 |
| 20 | G 1¼ | 185.0 | 28.0 x 3.5 | RP 3/4 | 16.3 | 50.0 | 50.0 | 243.0 | 229.0 | 239.0 | 53.0 |
| 25 | G 1½ | 200.0 | 33.0 x 3.5 | RP 1 | 19.1 | 55.0 | 55.0 | 264.0 | 252.0 | 256.0 | 60.0 |

Dimensions in mm

Dimension L of metering tube material PVDF (code 20) reduced by 3 mm.

1) Connection type

Code 7R: Union end with Rp threaded socket insert

2) Union material

Code 1: Insert PVC-U, union nut PP grey


Code 1V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PP beige union nut

Code 2V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PVDF union nut

Code 6: Malleable iron

Code 7: Insert 1.4404 (Rp threaded socket), union nut stainless steel

Metal union for spigot DIN

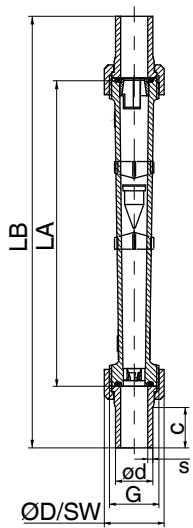

| DN | Connection type code ¹⁾ | | | | | | | | | | | | | | |
|----|------------------------------------|-------|------------|------|--------|------------|-------|------|------|------|------|-----|-----|-----|-----|
| | 0, 16, 17, 18 | | | 18 | 17 | 0 | 16 | 16 | 0 | 17 | 18 | | | | |
| | Union material Code ²⁾ | | | | | | | | | | | | | | |
| | G | LA | O-ring | 41 | 1V, 2V | 41, 1V, 2V | | | | | | | | | |
| | | | SW | ØD | c | LB | ød | | | | s | | | | |
| 10 | G 3/4 | 165.0 | 15.5 x 2.6 | 32.0 | 35.0 | 34.0 | 240.0 | 14.0 | 13.0 | - | 12.0 | 1.0 | - | 1.5 | 2.0 |
| 15 | G 1 | 170.0 | 20.2 x 3.5 | 41.0 | 43.0 | 34.0 | 246.0 | 20.0 | 19.0 | 18.0 | 18.0 | 1.0 | 1.5 | 1.5 | 2.0 |
| 20 | G 1¼ | 185.0 | 28.0 x 3.5 | 50.0 | 53.0 | 34.0 | 261.0 | 24.0 | 23.0 | 22.0 | 22.0 | 1.0 | 1.5 | 1.5 | 2.0 |
| 25 | G 1½ | 200.0 | 33.0 x 3.5 | 55.0 | 60.0 | 34.0 | 279.0 | 30.0 | 29.0 | 28.0 | 28.0 | 1.0 | 1.5 | 1.5 | 2.0 |

Dimensions in mm

Dimension L of metering tube material PVDF (code 20) reduced by 3 mm.

1) **Connection type**

Code 0: Spigot DIN

Code 16: Spigot EN 10357 series B, formerly DIN 11850 series 1

Code 17: Spigot EN 10357 series A (formerly DIN 11850 series 2)

Code 18: Spigot DIN 11850 series 3


2) **Union material**

Code 1V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PP beige union nut

Code 2V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PVDF union nut

Code 41: Insert 1.4435 (butt weld spigot), union nut stainless steel

Metal union for spigot SMS, ASME, ISO

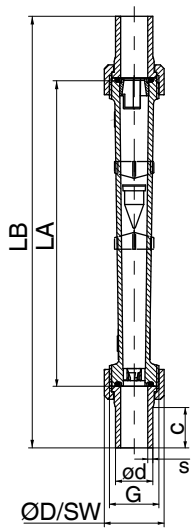

| DN | Connection type code ¹⁾ | | | | | | | | | | | | |
|----|------------------------------------|-------|------------|------|--------|------------|-------|------|------|------|-----|------|-----|
| | 37, 59, 60 | | | | | | 60 | 37 | 59 | 60 | 59 | 37 | |
| | Union material code ²⁾ | | | | | | | | | | | | |
| | G | LA | O-ring | 41 | 1V, 2V | 41, 1V, 2V | | | | | | | |
| | | | SW | ØD | c | LB | ød | | s | | | | |
| 10 | G 3/4 | 165.0 | 15.5 x 2.6 | 32.0 | 35.0 | 34.0 | 240.0 | 17.2 | - | 9.5 | 1.6 | 0.9 | - |
| 15 | G 1 | 170.0 | 20.2 x 3.5 | 41.0 | 43.0 | 34.0 | 246.0 | 21.3 | - | 12.7 | 1.6 | 1.65 | - |
| 20 | G 1¼ | 185.0 | 28.0 x 3.5 | 50.0 | 53.0 | 34.0 | 261.0 | 26.9 | - | 19.1 | 1.6 | 1.65 | - |
| 25 | G 1½ | 200.0 | 33.0 x 3.5 | 55.0 | 60.0 | 34.0 | 279.0 | 33.7 | 25.0 | 25.4 | 1.6 | 1.65 | 1.2 |

Dimensions in mm

Dimension L of metering tube material PVDF (code 20) reduced by 3 mm.

1) Connection type

Code 0: Spigot DIN

Code 16: Spigot EN 10357 series B, formerly DIN 11850 series 1

Code 17: Spigot EN 10357 series A (formerly DIN 11850 series 2)

Code 18: Spigot DIN 11850 series 3


2) Union material

Code 1V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PP beige union nut

Code 2V: Insert 1.4435 (butt weld spigot), insert 1.4404 (Rp threaded socket), PVDF union nut

Code 41: Insert 1.4435 (butt weld spigot), union nut stainless steel

Flange connection code 4, 8, 39

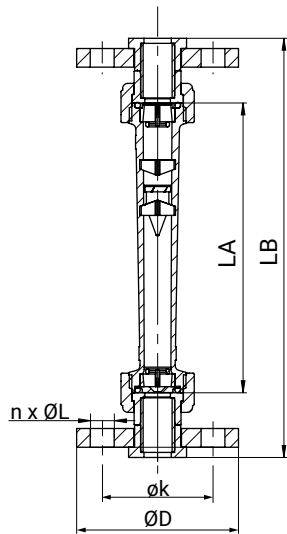

| DN | Connection type (code) ¹⁾ | | | | | | | | | |
|----|--------------------------------------|------------|-------|-------|-------|----------|-------|---------|----------|----------|
| | 4, 8, 39 | | 4, 39 | | 8, 39 | 4, 8, 39 | 4 | 8, 39 | 4, 8 | 39 |
| | Union material (code) ²⁾ | | | | | | | | | |
| | 1, 5, 7 | | 1 | 5 | 7 | 1, 5, 7 | 1, 5, | 1, 5, 7 | | |
| | LA | O-ring | LB | | | ØD | øk | | n x ØL | |
| 10 | 165.0 | 15.5 x 2.6 | 241.0 | - | - | 90.0 | 55.0 | - | 4 x 14.0 | - |
| 15 | 170.0 | 20.2 x 3.5 | 246.0 | 256.0 | 305.0 | 95.0 | 65.0 | 60.0 | 4 x 14.0 | 4 x 16.0 |
| 20 | 185.0 | 28.0 x 3.5 | 273.0 | 279.0 | 326.0 | 105.0 | 75.0 | 70.0 | 4 x 14.0 | 4 x 16.0 |
| 25 | 200.0 | 33.0 x 3.5 | 300.0 | 302.0 | 344.0 | 115.0 | 85.0 | 79.0 | 4 x 14.0 | 4 x 16.0 |

Dimensions in mm

1) **Connection type**

- Code 4: Plastic-loose backing flange, flange EN 1092, PN 10, form B
- Code 8: Flange EN 1092, PN 16, form B
- Code 39: Flange ANSI Class 125/150 RF

2) **Union material**

- Code 1: Insert PVC-U, union nut PP grey
- Code 5: Insert PP, union nut PP beige
- Code 7: Insert 1.4404 (RP threaded socket), union nut stainless steel

Accessories

Information on accessories for 800, 840, 850

To increase the versatility of GEMÜ flowmeters, numerous accessories have been developed which can be retrofitted onto the metering tube without modification.

The float, however, must be one containing a magnet, in order for these accessories to function.



GEMÜ 125x

Limit switches

Limit switches with bistable reed contact (change-over contact or make contact) can be combined with GEMÜ flowmeters with magnetic float. They can be easily mounted and adjusted by clamping them onto the flowmeter. The electrical connection is via a cable gland. An ATEX version is available on request.



GEMÜ 1276

Digital display unit

The GEMÜ 1276 digital display unit is available as types M11 (4-digit) and M21, M31 (5-digit). The device can be programmed at the front using a disconnectable keypad. Programming is made using the easy to understand menu guidance.



GEMÜ 127x

Instrument sensor

Instrument sensors are suitable for continuous flow monitoring of GEMÜ flowmeters with magnetic float. They can be easily mounted and adjusted by clamping them onto the flowmeter. The electrical connection is via a cable gland.



GEMÜ Gebr. Müller Apparatebau GmbH & Co. KG
Fritz-Müller-Straße 6-8, 74653 Ingelfingen-Criesbach, Germany
Phone +49 (0) 7940 1230 · info@gemue.de
www.gemu-group.com