

CAB · CBB Type Detective Volume Distributor




◆ Features:

1. Fixed amount of oil feeding. The lubrication points of volume distributor supply a fixed flow of lubricant.
2. CAB type has many kinds of discharge volume to be chosen: 0.03, 0.06, 0.10, 0.16 cc/stroke. As ordering, please details the discharge volume wanted.
3. CBB type also has many kinds of discharge volume to be chosen: 0.1, 0.2, 0.3, 0.4, 0.5 cc/stroke. As ordering, please details the discharge volume wanted.
4. CAB, CBB type volume distributors have to work with pressure-relief type oil lubricators, and oil will feed during the operation time of the lubricator.
5. The lowest operation pressure of CAB, CBB is 8 kgf/cm², and the max pressure is 30 kgf/cm².
6. The viscosity range of oil is 32-90 cSt @ 40°C.



Model	Outlet Num.	Inlet Bore	Outlet Bore	A (mm)	B (mm)	C (mm)	Discharge Volume	Operation Pressure Range	Weight (g)
CAB-1	1	M8xP1.0	M8xP1.0	Ø12	33	46	0.03cc 0.06cc 0.10cc 0.16cc	8kgf/cm ² to 30kgf/cm ²	30
CAB-2	2	M10xP1.0		47					96
CAB-3	3			62	128				
CAB-5	5			92	192				
CAB-6	6			107	215				
CAB-8	8			186	297				

◆ Order Code :

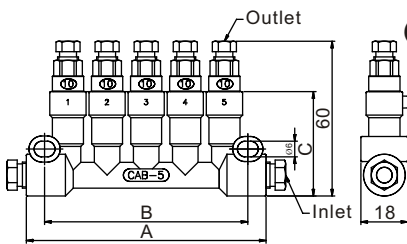


CAB-5 ——— 1 ——— 1 ——— 1 ——— 1 ——— 1

Outlet Num.	First	Second	Third	Fourth	Fifth
	Outlet Volume	Outlet Volume	Outlet Volume	Outlet Volume	Outlet Volume
1 : 1 Outlet	1 : 0.03cc	1 : 0.03cc	1 : 0.03cc	1 : 0.03cc	1 : 0.03cc
2 : 2 Outlets	2 : 0.06cc	2 : 0.06cc	2 : 0.06cc	2 : 0.06cc	2 : 0.06cc
3 : 3 Outlets	3 : 0.10cc	3 : 0.10cc	3 : 0.10cc	3 : 0.10cc	3 : 0.10cc
5 : 5 Outlets	4 : 0.16cc	4 : 0.16cc	4 : 0.16cc	4 : 0.16cc	4 : 0.16cc
6 : 6 Outlets					
8 : 8 Outlets					



Model	Outlet Num.	Inlet Bore	Outlet Bore	A (mm)	B (mm)	C (mm)	Discharge Volume	Operation Pressure Range	Weight (g)
CBB-1	1	M10xP1.0	M8xP1.0	Ø16	37	68	0.1cc 0.2cc 0.3cc 0.4cc 0.5cc	8kgf/cm ² to 30kgf/cm ²	79
CBB-2	2			53					178
CBB-3	3			70	250				
CBB-5	5			104	410				

◆ Order Code :

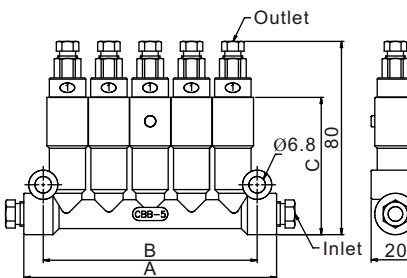

CBB-5 ——— 1 ——— 1 ——— 1 ——— 1 ——— 1

Outlet Num.	First	Second	Third	Fourth	Fifth
	Outlet Volume	Outlet Volume	Outlet Volume	Outlet Volume	Outlet Volume
1 : 1 Outlet	1 : 0.1cc	1 : 0.1cc	1 : 0.1cc	1 : 0.1cc	1 : 0.1cc
2 : 2 Outlets	2 : 0.2cc	2 : 0.2cc	2 : 0.2cc	2 : 0.2cc	2 : 0.2cc
3 : 3 Outlets	3 : 0.3cc	3 : 0.3cc	3 : 0.3cc	3 : 0.3cc	3 : 0.3cc
5 : 5 Outlets	4 : 0.4cc	4 : 0.4cc	4 : 0.4cc	4 : 0.4cc	4 : 0.4cc
	5 : 0.5cc	5 : 0.5cc	5 : 0.5cc	5 : 0.5cc	5 : 0.5cc