



Hydro Pneumatic Test Pumps 1500-2500-3000 Bar



HP-26

- » Maximum working pressure: 1500 bar, 2500 Bar, 3000 Bar.
- » Single speed, single acting hydraulic system.
- » Works with compressed air between 1.5 - 7.0 bar.
- » Does not operate over capacity due to the built-in safety valve.
- » Readable pressure gauge, scale 50/25 bar, diameter ø165mm.
- » Four oil outlet ports with Cejin brand coupling.
- » Hydraulic pressure level is adjusted by the air inlet valve.
- » Maintenance repair and spare parts services in Iran.

Technical Data	Units	HP-25	HP-26	HP-27
Working Pressure (max)	bar	1500	2500	3000
Flow Rate (ltr/min)	Ltr/dak	0.5	0.5	0.5
Pump Type	*	Single Acting	Single Acting	Single Acting
Required Air Pressure	bar	1.5 - 7.0	1.5 - 7.0	1.5 - 8.0
Air Consumption at 6 bar	m <sup>3</sup>	0.53 m <sup>3</sup> /dak/min	0.6 m <sup>3</sup> /dak/min	0.6 m <sup>3</sup> /dak/min
Effective Oil Cap.	Ltr	7	10	10
Air Input Port	mm	9 mm	9 mm	9 mm
Output Port Thread	Npt	4 x CEJN 116	4 x CEJN 125	4 x CEJN 135
Gauge Diameter (ø)	mm	165	165	165
Gauge Scale	bar	0...1600	0...3000	0...4000
Pressure Resolution	bar	50	50	25
Pressure Units on Scale	#	Bar	Bar	Bar
Total Weight	kg	30.5	40	40
Dimensions (LxWxH)	mm	402x431x315	550x431x315	550x431x315


HP-25



HP-26



HP-27

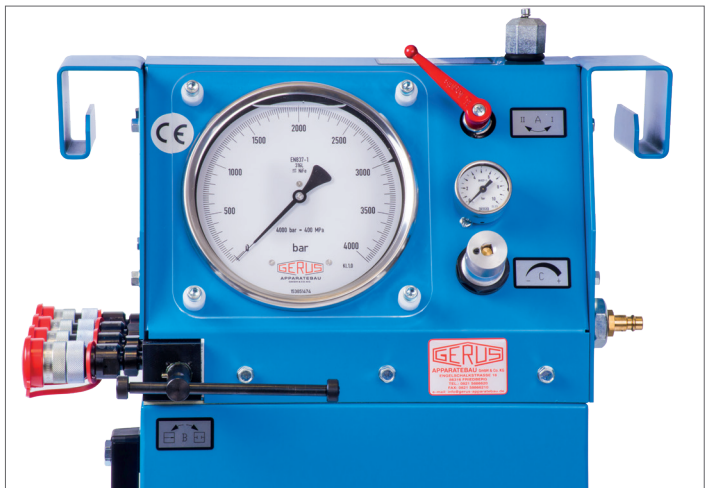

High Pressure Hoses and Couplings