

SPP - HEAVY DUTY HYDRAULIC PULLERS




Capacities from 75 to 220 tonnes

Wireless remote controlled operation

Powered driven trolley for easy positioning

The SPP range of heavy duty pullers offers a choice of 18 models with capacities ranging from 75 to 220 tonnes. The functional and ergonomic design of the heavy duty hydraulic pullers features a movable trolley and the two vertical supports provide stability and safety as well as allow the user to adjust the height to the desired position.

All models include self-centering pulling jaws that can rotate 180° and a wireless remote control that allows for an easier and safer operation. Ideal for use in steel plants, mines, shipyards, petrochemical industries for repair and maintenance applications.

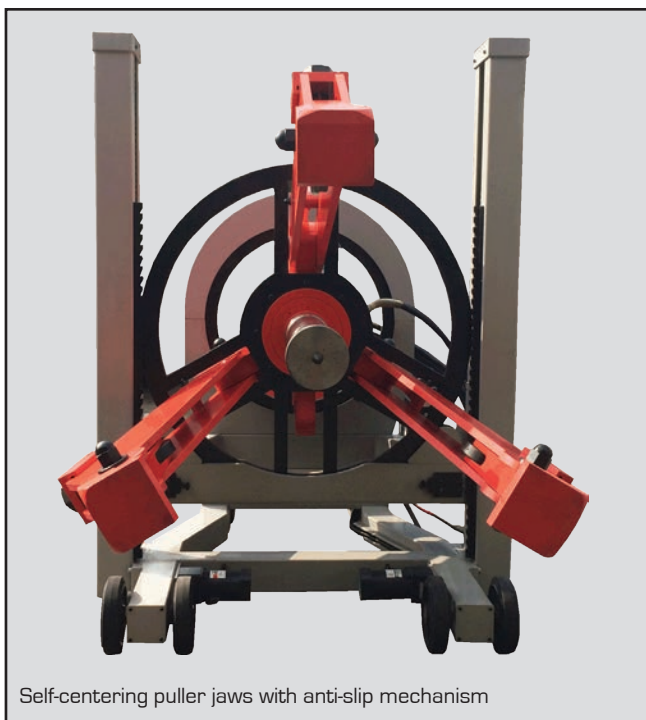

SPP - HEAVY DUTY HYDRAULIC PULLERS



SPP22045

Self-centering jaw design

Spread up to 1220mm

Adjustable height

- >> Hydraulically actuated jaws with adjustable jaw tip angle
- >> Anti-slip mechanism in puller jaws
- >> Easy to manoeuvre with wheel locking feature



Did you know

The SPP pullers incorporate the HEP2 series electric driven pump. For more information on HEP2 series pumps, see page 41.

Model number	Capacity tonnes	Type of puller	Motor Voltage	Stroke mm	Weight kg
Puller with 50Hz motor					
SPP7515	75	2 & 3 jaw	110/115V	165	660
SPP7525	75	2 & 3 jaw	220/240V	165	660
SPP7545	75	2 & 3 jaw	380/440V	165	660
SPP12015	120	2 & 3 jaw	110/115V	170	888
SPP12025	120	2 & 3 jaw	220/240V	170	888
SPP12045	120	2 & 3 jaw	380/440V	170	888
SPP22015	220	2 & 3 jaw	110/115V	170	1300
SPP22025	220	2 & 3 jaw	220/240V	170	1300
SPP22045	220	2 & 3 jaw	380/440V	170	1300
Puller with 60Hz motor					
SPP7516	75	2 & 3 jaw	110/115V	165	660
SPP7526	75	2 & 3 jaw	220/240V	165	660
SPP7546	75	2 & 3 jaw	380/440V	165	660
SPP12016	120	2 & 3 jaw	110/115V	170	888
SPP12026	120	2 & 3 jaw	220/240V	170	888
SPP12046	120	2 & 3 jaw	380/440V	170	888
SPP22016	220	2 & 3 jaw	110/115V	170	1300
SPP22026	220	2 & 3 jaw	220/240V	170	1300
SPP22046	220	2 & 3 jaw	380/440V	170	1300

Dimensions in mm	
Reach	Spread
490 - 700	110 - 1220
490 - 700	110 - 1220
490 - 700	110 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
490 - 700	110 - 1220
490 - 700	110 - 1220
490 - 700	110 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220
900 - 1100	150 - 1220