


Aquadisc 305 Technical Data


Membrane (8 000 μ holes)	EPDM	
Support	PP + 30% GF	
Ring	PP + stainless steel bolts	
Min operating flow	Nm ³ /h	3
Max. operating flow	Nm ³ /h	12 ponctually
Usual operating flow	Nm ³ /h	6 to 8
Operating temperature	°c	-10 to 110
Operating mode	tempo	continuous or not
Application	Waste water	Municipal and some industrial (ask us)

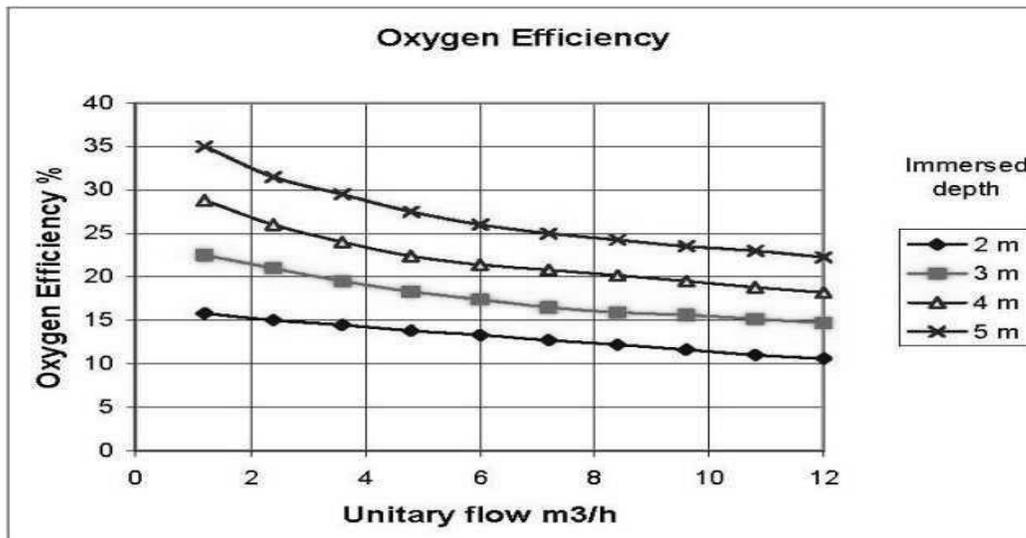

Europelec SAS • 209 rue de l'Université 75007 Paris
 Siège Tél. 01 44 82 39 50 • S. Financier Tél. 01 44 82 39 00
 Usine • Zone industrielle 60440 Brégy • eur@sfa-enviro.com

sfa-enviro.com | une division du groupe SFA

SAS au capital de 2 000 000 € - RCS Paris B 509 342 283 - Siret 509 342 283 00041
 APE 2814Z - TVA Intracommunautaire FR 23 509 342 283 - Coordonnées bancaires :
 IBAN : FR76 1020 7001 1820 2178 2406 225, BIC : CCBPFRPPMTG

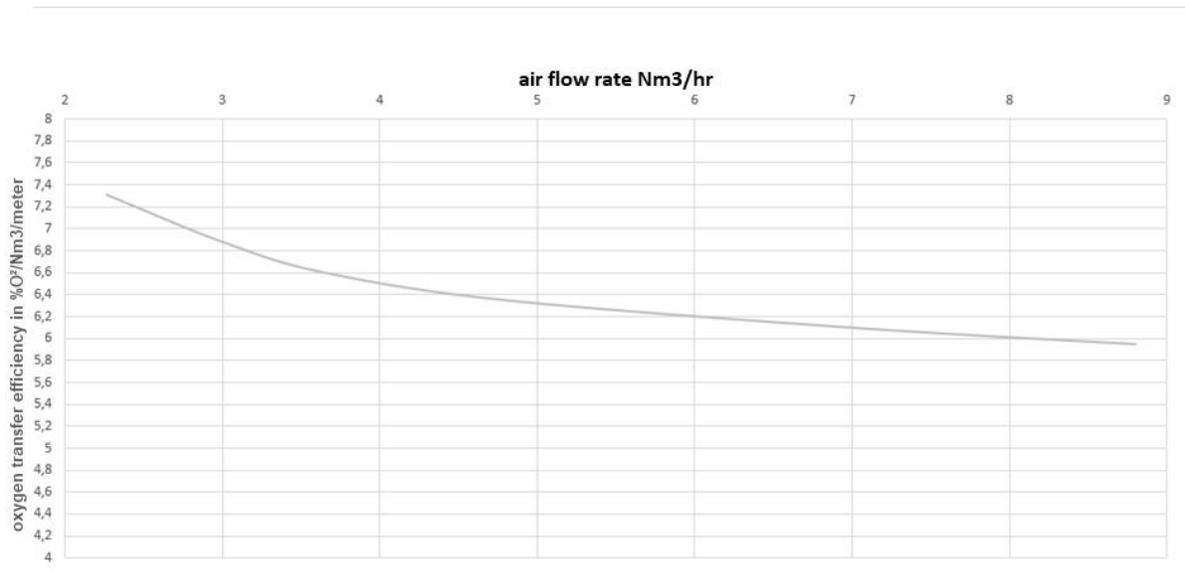

Measured at 5 meters water depth

Dimensions

External diffuser diameter	mm	305
Active surface diameter	mm	295
Active surface	m ²	0.068
Threaded connection		3/4" BSP
weight	kg	0,75
Bubble dimension	mm	1 to 3

