

Overload relay 25...100 A For motor protection Size S3, Class 10
 Contactor mounting Main circuit: Screw terminal Auxiliary circuit:
 Screw terminal Manual-Automatic-Reset !!! Phased-out product !!!
 Successor is SIRIUS 3RB3 Preferred successor type is >>3RB3046-
 1XB0<<

Product brand name	SIRIUS
Product designation	solid-state overload relay

General technical data

Size of contactor can be combined company-specific	S3
Power loss [W] total typical	0.05 W
Insulation voltage	1 000 V
<ul style="list-style-type: none"> with degree of pollution 3 rated value 	
Surge voltage resistance rated value	8 kV
Protection class IP	IP00
<ul style="list-style-type: none"> on the front 	
Shock resistance	15g / 11 ms
Type of protection	PTB 06 ATEX 3001 Ex II (2) GD
Reference code acc. to DIN EN 81346-2	F

Ambient conditions

Installation altitude at height above sea level	2 000 m
<ul style="list-style-type: none"> maximum 	
Ambient temperature	-25 ... +60 °C
<ul style="list-style-type: none"> during operation during storage during transport 	
Relative humidity during operation	100 %

Main circuit

Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	25 ... 100 A
Operating voltage	1 000 V
<ul style="list-style-type: none"> at AC-3 rated value maximum 	

Auxiliary circuit

Number of NC contacts for auxiliary contacts	1
Number of NO contacts for auxiliary contacts	1
Number of CO contacts	0
<ul style="list-style-type: none"> for auxiliary contacts 	

Operating current of auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
Operating current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

Protective and monitoring functions	
Trip class	CLASS 10E

Short-circuit protection	
Design of the fuse link	fuse gL/gG: 6 A
• for short-circuit protection of the auxiliary switch required	

Installation/ mounting/ dimensions	
Mounting position	any
Height	106 mm
Width	70 mm
Depth	124 mm
Required spacing	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	6 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm

— at the side

6 mm

Connections/Terminals

Product function <ul style="list-style-type: none">removable terminal for auxiliary and control circuit	Yes
Type of electrical connection <ul style="list-style-type: none">for main current circuitfor auxiliary and control current circuit	screw-type terminals screw-type terminals
Type of connectable conductor cross-sections <ul style="list-style-type: none">for main contacts<ul style="list-style-type: none">solidstrandedfinely stranded with core end processingat AWG conductors for main contacts	2x (2.5 ... 16 mm ²) 2x (10 ... 50 mm ²), 10 ... 70 mm ² 2x (2.5 ... 35 mm ²), 2.5 ... 50 mm ² 2x (10 ... 1/0), 1x (10 ... 2/0)
Type of connectable conductor cross-sections <ul style="list-style-type: none">for auxiliary contacts<ul style="list-style-type: none">solidfinely stranded with core end processingat AWG conductors for auxiliary contacts	0.5 ... 4 mm ² , 2x (0.5 ... 2.5 mm ²) 0.5 ... 2.5 mm ² , 2x (0.5 ... 1.5 mm ²) 2x (20 ... 14)

Electromagnetic compatibility

Conducted interference <ul style="list-style-type: none">due to burst acc. to IEC 61000-4-4due to conductor-earth surge acc. to IEC 61000-4-5due to conductor-conductor surge acc. to IEC 61000-4-5	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 2 kV (line to earth) corresponds to degree of severity 3 1 kV (line to line) corresponds to degree of severity 3
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge

Certificates/approvals

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------



[Miscellaneous](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2046-1EB0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2046-1EB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2046-1EB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2046-1EB0&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2046-1EB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2046-1EB0&objecttype=14&gridview=view1>

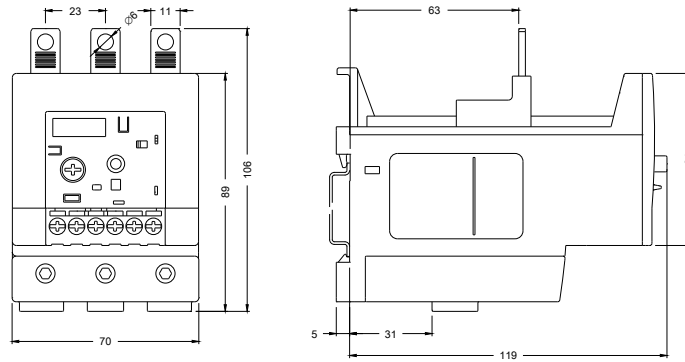

last modified:

11/15/2018