

BOLT TENSIONER HOSES, COUPLERS & HOSE REELS




Safety factor 3 : 1


Working pressure up to 1500 Bar

Supplied with quick connect couplings

Hi-Force ultra-high pressure hoses are compatible for use with all Hi-Force bolt tensioning products up to a maximum of 1500 Bar working pressure. Each hose is supplied complete with quick connect couplings on each end (male/female) and has a safety factor of 3:1 on maximum working pressure. Eleven standard lengths are available with special lengths available on request.

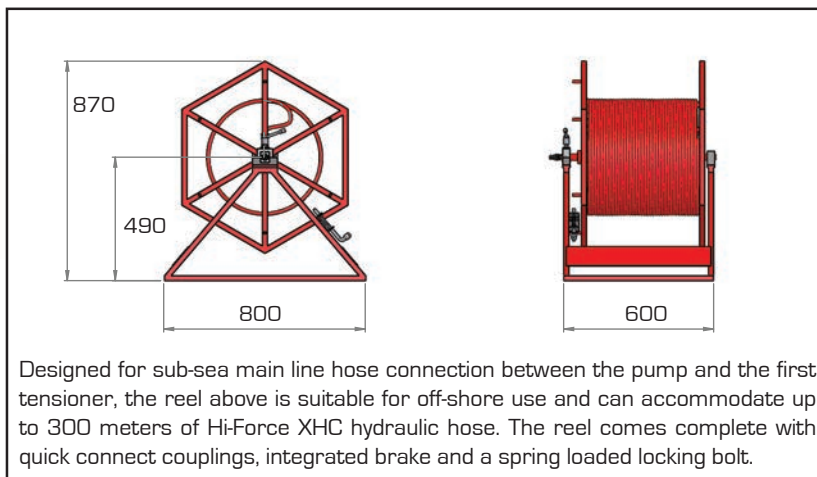

Designed for sub-sea main line hose connection between the pump and the first tensioner, the reel above is suitable for off-shore use and can accommodate up to 300 meters of Hi-Force XHC hydraulic hose. The reel comes complete with quick connect couplings, integrated brake and a spring loaded locking bolt.

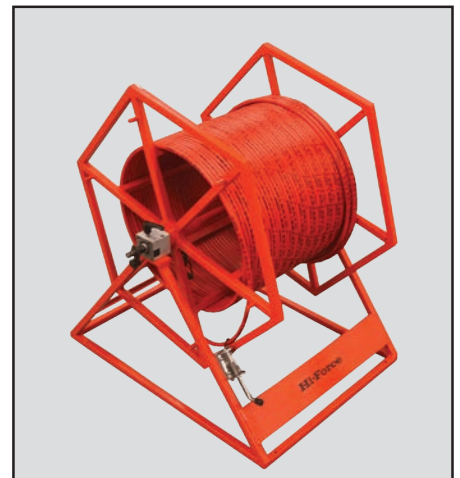

Model number	Maximum pressure Bar	Description
XHC1.5B	1500	Link hose complete with quick connect couplings, length 1.5 metres
XHC3B	1500	Link hose complete with quick connect couplings, length 3.0 metres
XHC5B	1500	Mainline hose complete with quick connect couplings, length 5.0 metres
XHC10B	1500	Mainline hose complete with quick connect couplings, length 10.0 metres
XHC25B	1500	Mainline hose complete with quick connect couplings, length 25.0 metres
XHC50B	1500	Mainline hose complete with quick connect couplings, length 50.0 metres
XHC100B	1500	Mainline hose complete with quick connect couplings, length 100.0 metres
XHC150B	1500	Mainline hose complete with quick connect couplings, length 150.0 metres
XHC200B	1500	Mainline hose complete with quick connect couplings, length 200.0 metres
XHC250B	1500	Mainline hose complete with quick connect couplings, length 250.0 metres
XHC300B	1500	Mainline hose complete with quick connect couplings, length 300.0 metres
XHR1	1500	Hose reel, suitable for up to 300 meters of XHC high pressure hose
STFC4	1500	Female coupling
STMC4	1500	Male coupling
STN1P2	1500	1/8" x 1/4" BSP nipple for current model STS1 only
STN1P4	1500	1/4" BSP nipple c/w bonded sealing washer (old design - not for STS1)
STN1P4-C	1500	1/4" BSP nipple with cone seat seal (current design - not for STS1)