



# Proportional pressure regulators VPPE



# Proportional pressure regulators VPPE


Product range overview

Function	Version	Pneumatic connection	Nominal size for pressurisation/exhaust [mm]	Pressure regulation range [bar]	Setpoint input		→ Page/Internet
					Voltage type 0 ... 10 V	Current type 4 ... 20 mA	
Proportional pressure regulator	<b>Without display</b>						
		G1/8	5/2.5	0.15 ... 6	■	-	6
	<b>With display</b>						
		G1/8	5/2.5	0.02 ... 2	■	■	10
0.06 ... 6							
0.1 ... 10							

# Proportional pressure regulators VPPE

Peripherals overview


FESTO

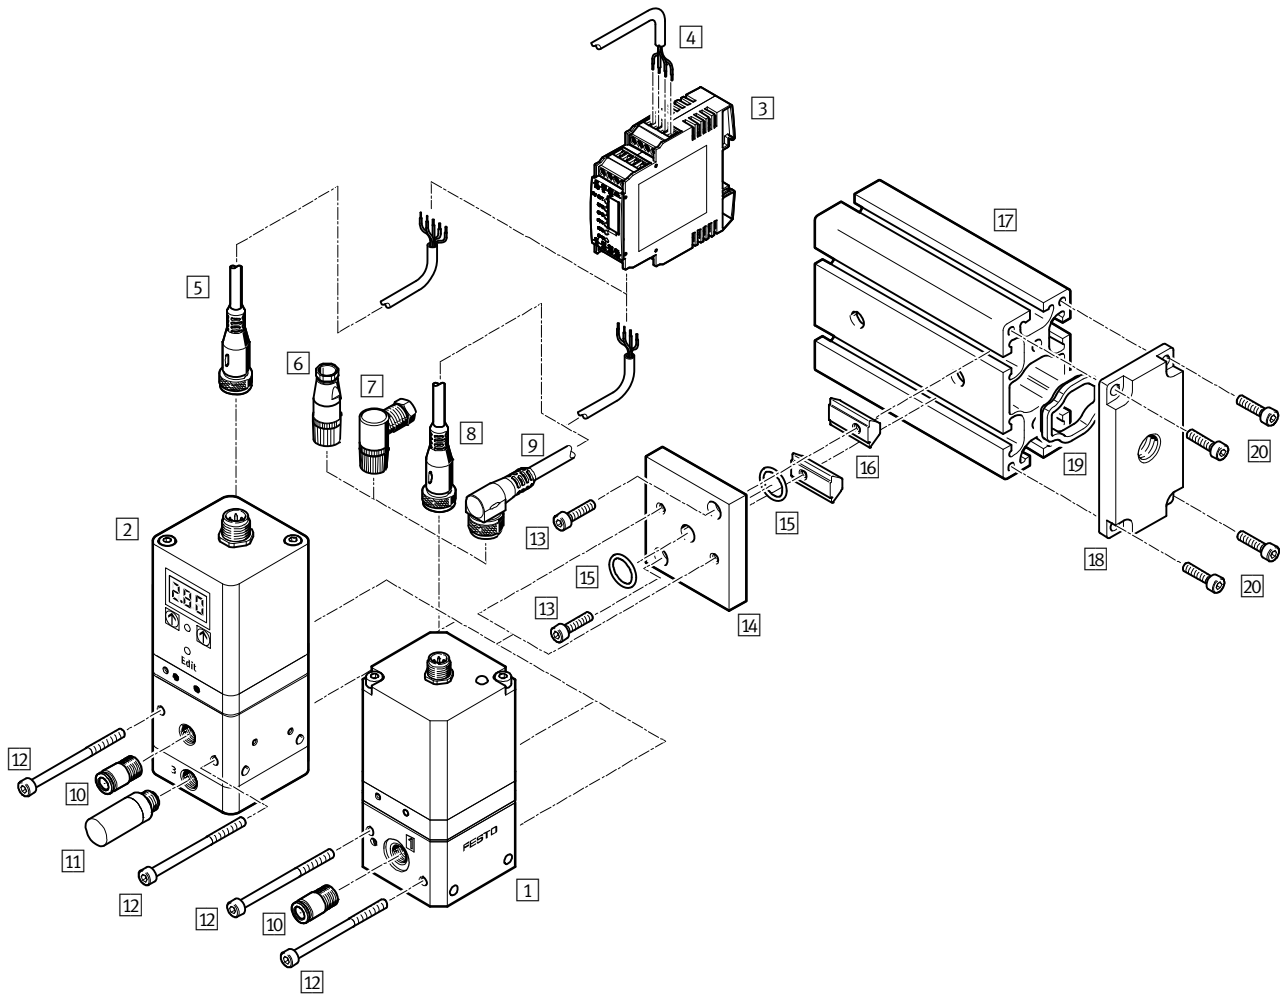

Accessories			
	Type	Brief description	→ Page/Internet
1	Prop. pressure regulator	VPPE...	8
2	Prop. pressure regulator with display	VPPE ... E1	13
3	Setpoint module	MPZ	For generating 6+1 analogue voltage signals
4	Digital input/output	–	For actuating the setpoint module
5	Connecting cable	SIM-M12-5GD-...-PU	With straight plug socket for actuating the VPPE...E1
6	Plug socket	SIE-GD	Straight plug socket for actuating the VPPE
7	Plug socket	SIE-WD-TR	Angled plug socket for actuating the VPPE
8	Connecting cable	SIM-M12-4GD-5PU	With straight plug socket for actuating the VPPE
9	Connecting cable	SIM-M12-4WD-5PU	With angled plug socket for actuating the VPPE
10	Push-in fitting	QS	For connecting compressed air tubing with standard O.D.
11	Silencer	U	For fitting in exhaust ports
12	Socket head screw M4x55	–	For screwing the VPPE to the mounting plate
13	Socket head screw M4x16	–	For screwing the mounting plate to the slot nut
14	Mounting plate (set)	VAME-P5-MK	For attaching the VPPE to the mounting rail (consists of mounting plate, slot nuts, screws and seals)
15	O-ring	–	For sealing
16	Slot nuts	–	For clamp fitting components on the mounting rail
17	Mounting rail	–	Standard mounting rail as central air supply
18	Compressed air supply plate (set)	VABF-P5-P3A3...	For supplying compressed air (consists of compressed air supply plate, screws and seal)
19	Seal	–	–
20	Socket head screw M5x12	–	For screwing a compressed air supply plate to the mounting rail

# Proportional pressure regulators VPPE


Peripherals overview – Additional power supply

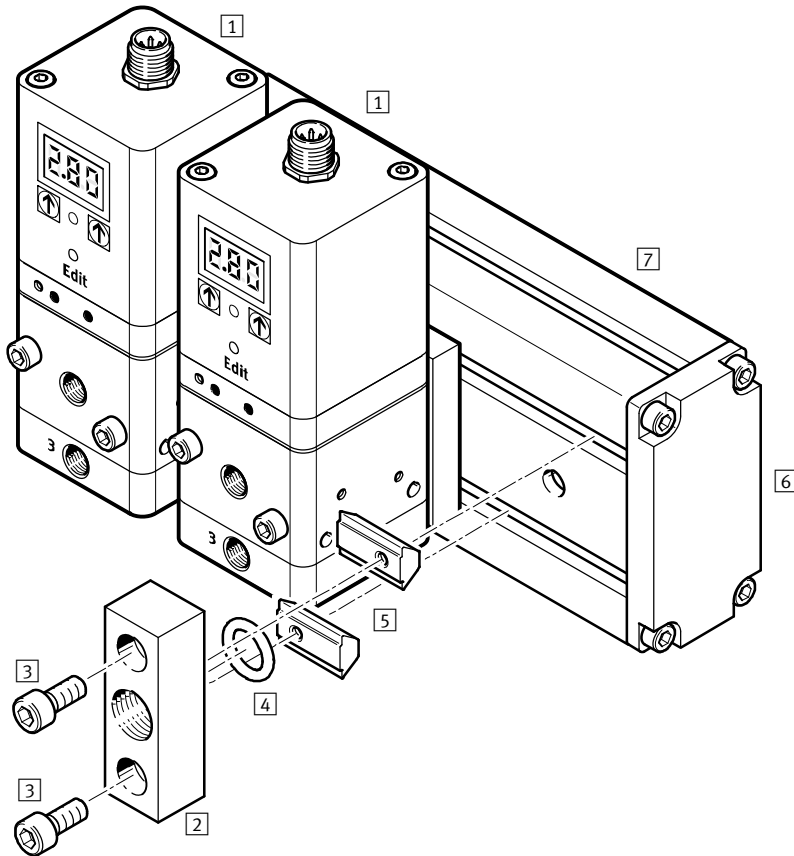

Accessories				
	Type	Brief description	→ Page/Internet	
1	Prop. pressure regulator with display	VPPE ... E1	–	13
2	Additional power supply module (set)	VABF-P5-P1A3...	For supplying compressed air (consists of compressed air supply plate, screws and seal)	15
3	Socket head screw M6x20	–	For screwing a compressed air supply plate to the slot nut	15
4	O-ring	–	For sealing	15
5	Slot nuts	–	For clamp fitting components on the mounting rail	15
6	End plate (set)	VABE-P5-C	For sealing the mounting rail (consists of an end plate, screws and seal)	15
7	Mounting rail	IPM-PN-08-40x80-AL	Standard mounting rail as central air supply	15




# Proportional pressure regulators VPPE without display

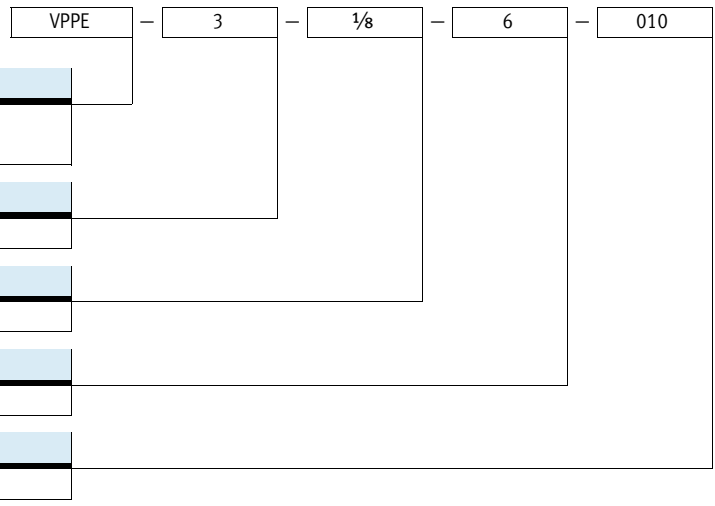Type codes



# Proportional pressure regulators VPPE without display


Technical data


-  Flow rate  
850 l/min
  -  Voltage  
21.6 ... 26.4 V DC
  -  Pressure regulation range  
0.15 ... 6 bar
- Variants
- Setpoint input as analogue voltage signal 0 ... 10 V



General technical data			
Pneumatic connection 1 and 2		G $\frac{1}{8}$	
Design, valve function		Piloted piston regulator, 3-way proportional pressure regulator, closed	
Sealing principle		Soft	
Actuation type		Electric	
Type of control		Piloted via 2/2-way valves	
Type of mounting		Via through-hole	
Mounting position		Any, preferably vertical	
Nominal size	Pressurisation	[mm]	5
	Exhaust	[mm]	2.5
Standard nominal flow rate		[l/min]	→ Graph
Product weight		[g]	445

## Flow rate qn as a function of output pressure p2

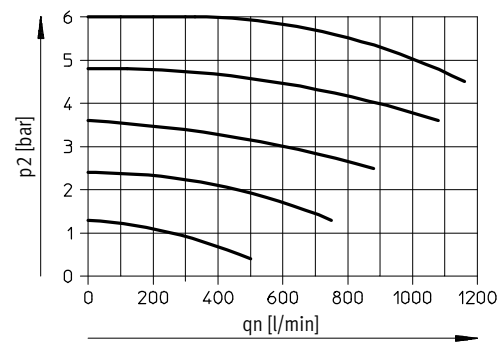


-  Note  
Output pressure is maintained unregulated if the power supply cable is interrupted.

## Electrical data


Electrical connection	Plug, round design, 4-pin, M12x1		
Operating voltage range	[V DC]	21.6 ... 26.4	
Power supply indicator	LED		
Residual ripple	[%]	10	
Max. electrical power consumption	[W]	3.6	
Setpoint input signal	[V DC]	0 ... 10	
Switching time on/off	[ms]	550/1,300	
Protection against short circuit	For all electrical connections		
Protection against incorrect polarity	For all electrical connections		
Protection class	IP65		

## M12x1 – Pin allocation for VPPE



- 1 Supply  
21.6 ... 26.4 V DC
- 2 Setpoint value (-)
- 3 GND (-)
- 4 Setpoint value (+) 0 ... 10 V DC

## Circuit symbol



# Proportional pressure regulators VPPE without display


Technical data

Operating and environmental conditions	
Operating medium	Compressed air according to ISO 8573-1:2010 [7:4:4] Inert gases
Note on operating/pilot medium	Lubricated operation not possible
Supply pressure 1	[bar] 7 ... 8
Pressure regulation range	[bar] 0.15 ... 6
Max. pressure hysteresis	[bar] 0.15
Ambient temperature	[°C] 10 ... 50
Temperature of medium	[°C] 10 ... 50
Corrosion resistance class CRC <sup>1)</sup>	2
CE marking (see declaration of conformity)	In accordance with EU EMC Directive <sup>2)</sup>
Certification	C-Tick

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.  
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Information on materials	
Housing	Wrought aluminium alloy
Seals	Nitrile rubber







## Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

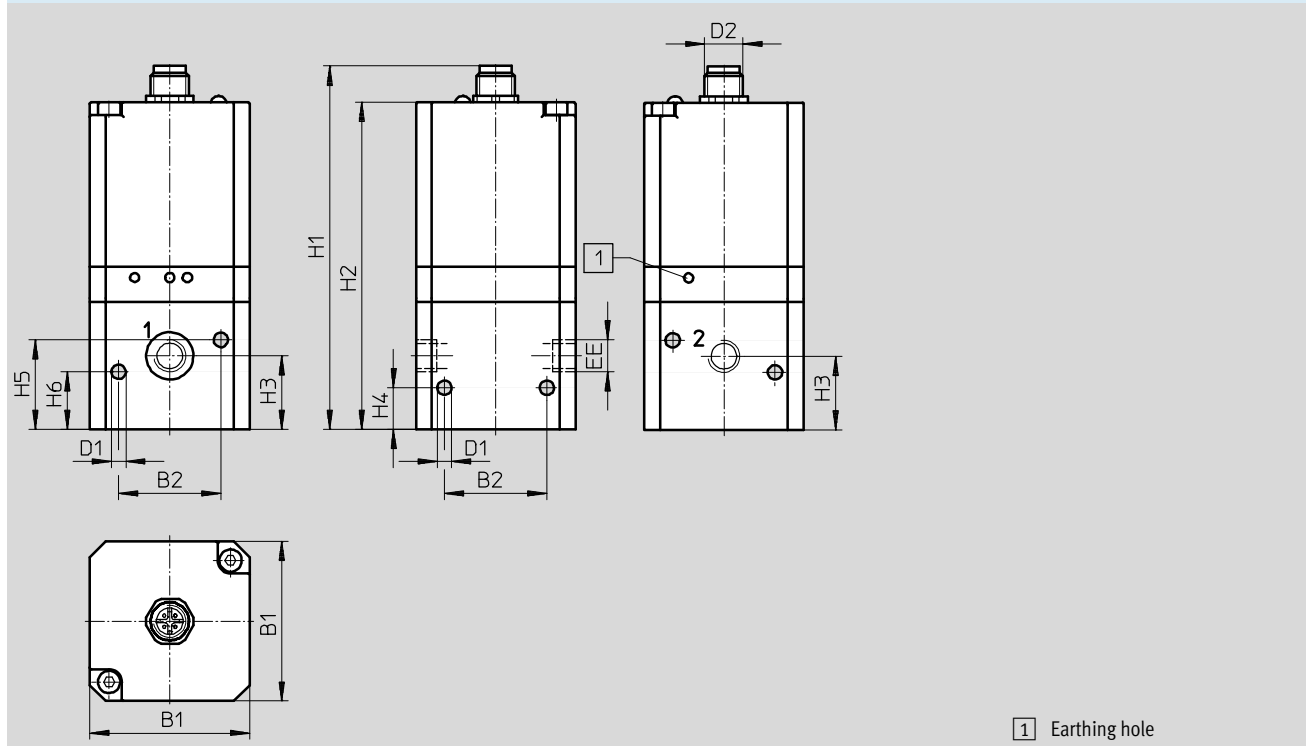

Type	B1	B2	∅D1	D2	EE	H1	H2	H3	H4	H5	H6
VPPE-3-1/8-6-010	50	32	4.5	M12x1	G1/8	114	102	23	13	28	18

# Proportional pressure regulators VPPE without display

Ordering data

Ordering data			
	Description	Part No.	Type
Proportional pressure regulator VPPE without display			
	<ul style="list-style-type: none"> <li>Pressure regulation range: 0 ... 6 bar</li> <li>Pneumatic connection: G<math>\frac{1}{8}</math></li> </ul>	<b>539639</b>	<b>VPPE-3-<math>\frac{1}{8}</math>-6-010</b>
Plug socket with cable <span style="float: right;">Technical data → Internet: nebu</span>			
	<ul style="list-style-type: none"> <li>Straight socket, M12x1, 5-pin</li> <li>Open end, 4-wire, cable length 5 m</li> </ul>	<b>164259</b>	<b>SIM-M12-4GD-5-PU</b>
	<ul style="list-style-type: none"> <li>Angled socket, M12x1, 5-pin</li> <li>Open end, 4-wire, cable length 5 m</li> </ul>	<b>164258</b>	<b>SIM-M12-4WD-5-PU</b>
Plug socket <span style="float: right;">Technical data → Internet: sie-gd</span>			
	Straight socket, M12x1, 4-pin	<b>18494</b>	<b>SIE-GD</b>
	Angled socket, M12x1, 4-pin	<b>12956</b>	<b>SIE-WD-TR</b>
Setpoint module <span style="float: right;">Technical data → Internet: mpz</span>			
	Setpoint module for generating 6 + 1 analogue voltage signals	<b>546224</b>	<b>MPZ-1-24DC-SGH-6-SW</b>



# Proportional pressure regulators VPPE with display




Type codes

VPPE – 3 – 1 – 1/8 – 6 – 010 – E1 T

Type	
VPPE	Proportional pressure regulator with switching valve head
Directional control function	
3	3-way pressure regulator
Valve function	
1	Normally closed
Pneumatic connection	
1/8	G1/8 female thread
Pressure regulation range	
2	0.02 ... 2 bar
6	0.06 ... 6 bar
10	0.1 ... 10 bar
Analogue setpoint input	
010	0 ... 10 V
420	4 ... 20 mA
Operator unit	
E1	Segmented LED display
Assembly	
–	In-line valve
T	Common supply manifold assembly (mounting rail)

# Proportional pressure regulators VPPE with display







Technical data

-  Flow rate  
310 ... 1,250 l/min
  -  Voltage  
21.6 ... 26.4 V DC
  -  Pressure regulation range  
0.02 ... 2 bar  
0.06 ... 6 bar  
0.1 ... 10 bar
- Variants
- Setpoint input as analogue voltage signal 0 ... 10 V
  - Setpoint input as analogue current signal 4 ... 20 mA
  - Assembly as in-line valve or on mounting rail
  - 3-digit LED display



General technical data			
Pneumatic connection 1, 2, 3		G <sup>1</sup> / <sub>8</sub>	
Design, valve function		Piloted diaphragm regulator, 3-way proportional pressure regulator	
Sealing principle		Soft	
Actuation type		Electric	
Reset method		Mechanical spring	
Type of control		Piloted via 2/2-way valves	
Type of mounting		Via through-hole	
Mounting position		Any, preferably vertical	
Nominal size	Pressurisation	[mm]	5
	Exhaust	[mm]	2.5
Standard nominal flow rate		[l/min]	→ Graphs
Product weight		[g]	390

## Flow rate qn as a function of output pressure p2

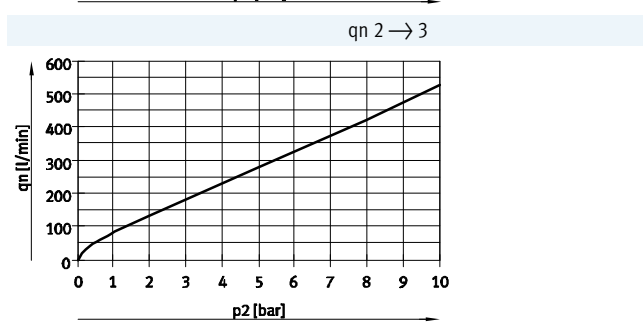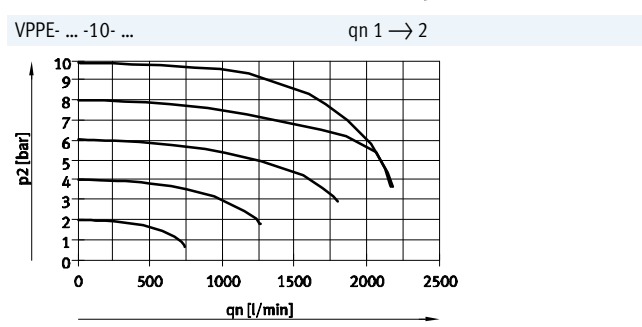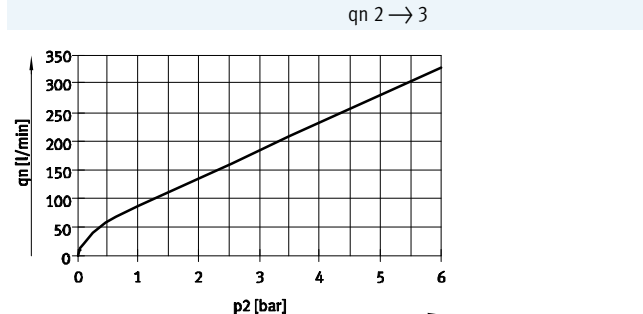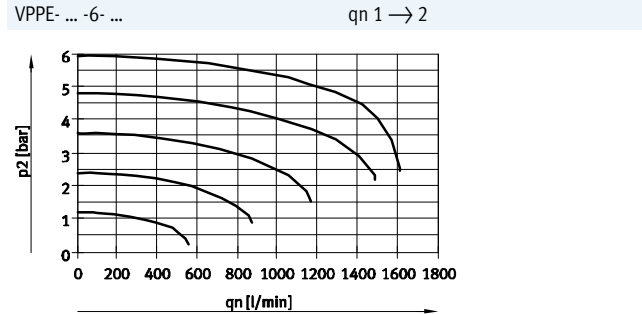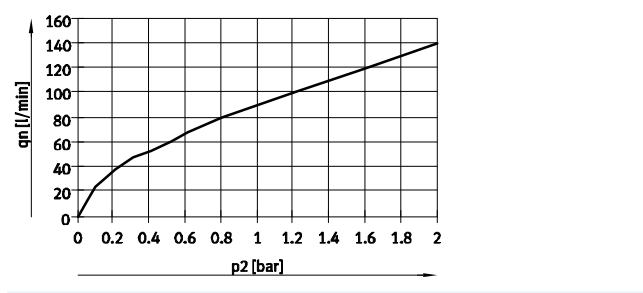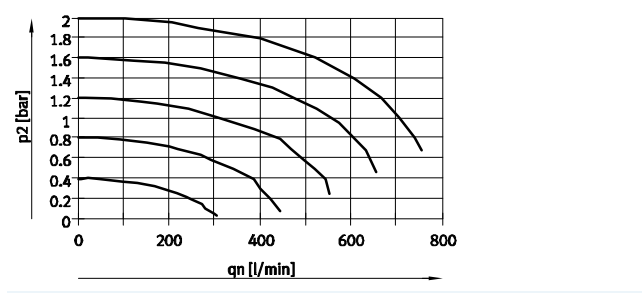

# Proportional pressure regulators VPPE with display

Technical data

Electrical data			
Electrical connection		Plug, round design, 5-pin, M12x1	
Operating voltage range		[V DC]	21.6 ... 26.4
Power supply indicator		LED	
Residual ripple		[%]	10
Max. electrical power consumption		[W]	4.2
Analogue signal range		Voltage	[V DC] 0 ... 10
Output/input		Current	[mA] 4 ... 20
Protection against short circuit		For all electrical connections	
Switching output		PNP	
Protection against incorrect polarity		For all electrical connections	
Protection class		IP65	

Operating and environmental conditions			
Pressure regulation range		[bar]	0.02 ... 2      0.06 ... 6      0.1 ... 10
Operating medium		Compressed air according to ISO 8573-1:2010 [7:4:4] Inert gases	
Note on operating/pilot medium		Lubricated operation not possible	
Supply pressure 1 <sup>1)</sup>		[bar]	3 ... 4      6 ... 8      6 ... 11
Max. pressure hysteresis		[mbar]	20      30      50
FS (full scale) linearity error		[%]	± 1
FS (full scale) repetition accuracy		[%]	0.5
Temperature coefficient		[%/K]	0.04
Duty cycle		[%]	100
Ambient temperature		[°C]	0 ... 60
Temperature of medium		[°C]	10 ... 50
Corrosion resistance class		[CRC]	2 <sup>2)</sup>
CE marking (see declaration of conformity)		To EU EMC Directive <sup>3)</sup>	

1) Supply pressure 1 should always be 1 bar greater than the maximum regulated output pressure.


2) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

3) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: [www.festo.com/sp](http://www.festo.com/sp) → User documentation.


If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

## Pin allocation for VPPE with display, M12x1



- 1 Supply  
21.6 ... 26.4 V DC
- 2 Setpoint value (-)
- 3 GND (-)
- 4 Setpoint value (+) 0 ... 10 V DC /  
4 ... 20 mA
- 5 Actual value output or switching  
output (can be chosen via the  
control panel)

## Circuit symbol



## Materials

Housing	Anodised wrought aluminium alloy
Note on materials	RoHS-compliant

-  - Note

Output pressure remains unregulated if the power supply cable is interrupted.


# Proportional pressure regulators VPPE with display

Technical data

FESTO

## Dimensions




Download CAD data → [www.festo.com](http://www.festo.com)

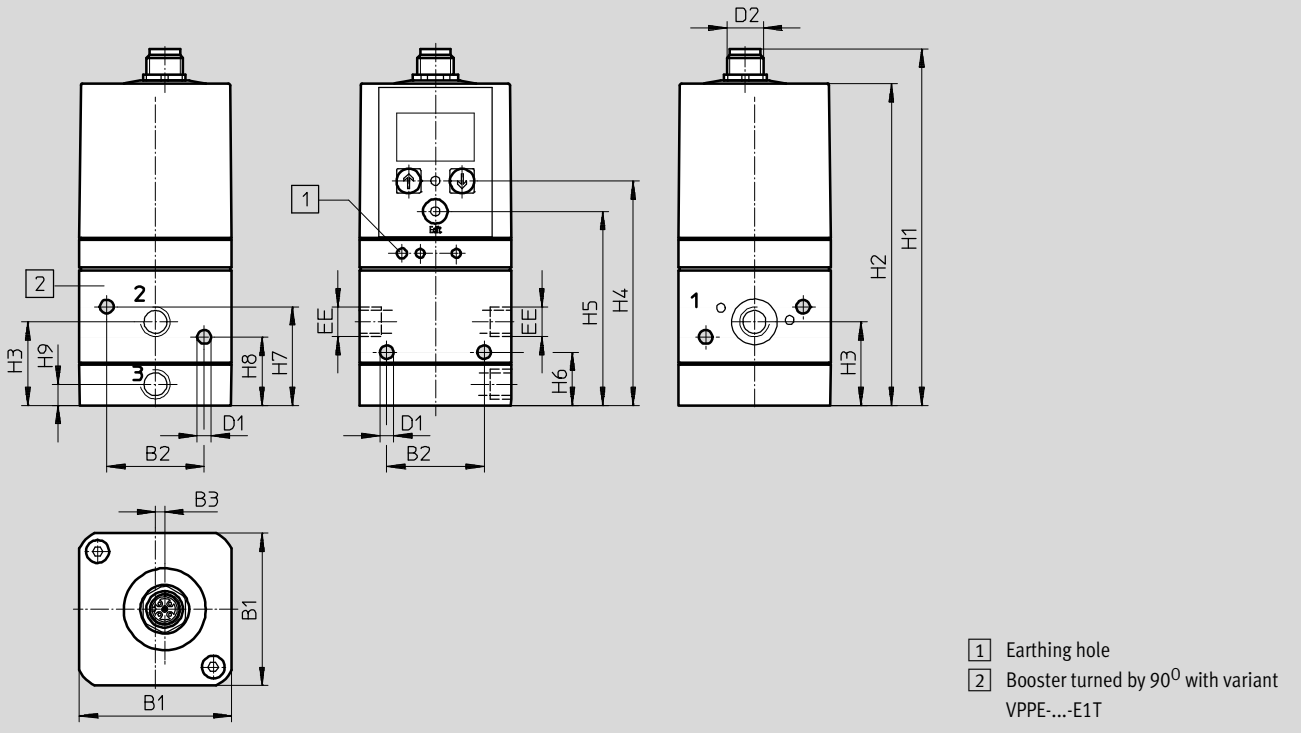

Type	B1	B2	B3	∅ D1	D2	EE	H1	H2	H3	H4	H5	H6	H7	H8	H9
VPPE-3-1/8- ... E1 ...	50	32	3.1	4.5	M12x1	G1/8	117.2	105.8	27.5	73.8	63.8	17.5	32.5	22.5	7

# Proportional pressure regulators VPPE with display

Ordering data

Ordering data			
	Description	Part No.	Type
Proportional pressure regulator VPPE with display			
	Voltage type 0 ... 10 V		
	Pressure regulation range 0.02 ... 2 bar	557771	VPPE-3-1-1/8-2-010-E1
		557777	VPPE-3-1-1/8-2-010-E1T
	Pressure regulation range 0.06 ... 6 bar	557772	VPPE-3-1-1/8-6-010-E1
		567539	VPPE-3-1-1/8-6-010-E1T
	Pressure regulation range 0.1 ... 10 bar	557773	VPPE-3-1-1/8-10-010-E1
		557778	VPPE-3-1-1/8-10-010-E1T
	Current type 4 ... 20 mA		
	Pressure regulation range 0.02 ... 2 bar	557774	VPPE-3-1-1/8-2-420-E1
		557779	VPPE-3-1-1/8-2-420-E1T
	Pressure regulation range 0.06 ... 6 bar	557775	VPPE-3-1-1/8-6-420-E1
		567540	VPPE-3-1-1/8-6-420-E1T
Pressure regulation range 0.1 ... 10 bar	557776	VPPE-3-1-1/8-10-420-E1	
	557780	VPPE-3-1-1/8-10-420-E1T	
Connecting cable <span style="float: right;">Technical data → Internet: nebu</span>			
	<ul style="list-style-type: none"> <li>• Straight socket, M12x1, 5-pin</li> <li>• Open end, 5-wire</li> </ul>	2.5 m	175715 SIM-M12-5GD-2,5-PU
		5 m	175716 SIM-M12-5GD-5-PU
Setpoint module <span style="float: right;">Technical data → Internet: mpz</span>			
	Setpoint module for generating 6 + 1 analogue voltage signals	546224	MPZ-1-24DC-SGH-6-SW

# Mounting rail for proportional pressure regulators VPPE

Technical data

## General

### Design

Some selected types of the pressure regulator VPPE can be screwed to a mounting rail. This has the advantage that the mounting rail can be used to create a central compressed air supply.  
The air can be fed into the mounting rail:

- at one end or
- at both ends through end plates,
- using an intermediate air supply module (in applications where an increased air rate is required).

The holes for the mounting rail must be drilled according to the assembly instructions. The pressure regulators VPPE are screwed to the mounting rail using the mounting plate. The end

plates are screwed to the left and right end faces of the mounting rail. See the assembly instructions for further information:  
➔ Internet: vppe

### Compressed air supply on the mounting rail

When using the mounting rail as a central compressed air supply, make sure that the required compressed air supply is guaranteed. Bear in mind

that an intermediate air supply module needs a valve position. The intermediate air supply module takes up one VPPE valve position.

### Recommendation for compressed air supply

E.g. with tubing Ø 16 mm with simultaneous max. flow rate for all valves, the following applies:  
Compressed air supply – number of valves:

- At one end – max. 5 valves
- At both ends – max. 10 valves
- With intermediate air supply module – max. 5 valves per module



Note

- Intermediate air supply modules must always be centred on the mounting rail.
- Multiple intermediate air supply modules must be evenly distributed.



Note

Only the following types of proportional pressure regulators VPPE can be mounted on mounting rails using a mounting plate:

- Valve VPPE with LED display, VPPE-3-1/8-6-010
- Valve VPPE with display and top part rotated by 90° VPPE- ... -E1T

Further information on mounting proportional pressure regulators VPPE as well as intermediate air supply

modules on mounting rails can be found in the assembly instructions:  
➔ Internet: vppe

## Mounting plate (set) materials


Plate	Wrought aluminium alloy
Seals	Nitrile rubber
Screws	Steel
Note on materials	RoHS-compliant
Corrosion resistance class	[CRC] 2 <sup>1)</sup>

1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

## Dimensions – Mounting plate






Download CAD data ➔ [www.festo.com](http://www.festo.com)

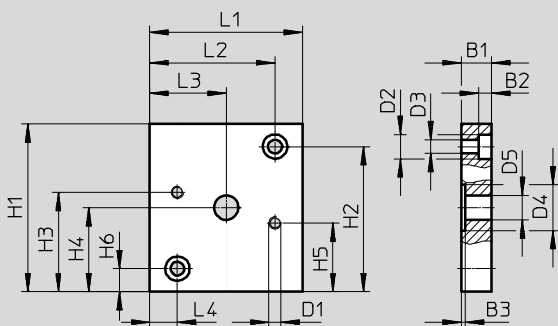

Type	B1	B2	B3	D1	∅D2	∅D3	∅D4	∅D5	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4
VAME-P5-MK	10	4.6	1.3	M4	8	4.5	15	8	55	47.5	32.5	27.5	22.5	7.5	50	41	25	9

# Mounting rail for proportional pressure regulators VPPE

Ordering data

Ordering data		Part No.	Type
<b>Mounting plate set</b>			
	Set, consisting of: <ul style="list-style-type: none"> <li>• 1x mounting plate, weight: 110 g</li> <li>• 2x socket head screws M4X55</li> <li>• 2x socket head screws M4X16</li> <li>• 2x slot nuts</li> <li>• 2x O-rings</li> </ul>	<b>570966</b>	<b>VAME-P5-MK</b>
<b>Profile column (mounting rail)</b>			
	Made from aluminium, as central air supply, length: individually adaptable	<b>175964</b>	<b>HMBS-80/40- -</b>
<b>End plate set (closed)</b>			
	For sealing the mounting rail, consisting of: <ul style="list-style-type: none"> <li>• 1x plate</li> <li>• 1x seal</li> <li>• 4x socket head screws M5x12</li> </ul>	<b>8021858</b>	<b>VABE-P5-C</b>
<b>Compressed air supply plate set</b>			
	With connecting thread G $\frac{1}{4}$ , consisting of: <ul style="list-style-type: none"> <li>• 1x plate with connecting thread G<math>\frac{1}{4}</math></li> <li>• 1x seal</li> <li>• 4x socket head screws M5x12</li> </ul>	<b>8021859</b>	<b>VABF-P5-P3A3-G14</b>
	With connecting thread G $\frac{3}{8}$ , consisting of: <ul style="list-style-type: none"> <li>• 1x plate with connecting thread G<math>\frac{3}{8}</math></li> <li>• 1x seal</li> <li>• 4x socket head screws M5x12</li> </ul>	<b>8021860</b>	<b>VABF-P5-P3A3-G38</b>
	With connecting thread G $\frac{1}{2}$ , consisting of: <ul style="list-style-type: none"> <li>• 1x plate with connecting thread G<math>\frac{1}{2}</math></li> <li>• 1x seal</li> <li>• 4x socket head screws M5x12</li> </ul>	<b>8021861</b>	<b>VABF-P5-P3A3-G12</b>
<b>Additional power supply module set</b>			
	Connection G $\frac{1}{4}$ , consisting of: <ul style="list-style-type: none"> <li>• 1x plate with connecting thread G<math>\frac{1}{4}</math></li> <li>• 1x O-ring</li> <li>• 2x slot nuts</li> <li>• 2x socket head screws M6x20</li> </ul>	<b>8021862</b>	<b>VABF-P5-P1A3-G14</b>
	Connection G $\frac{3}{8}$ , consisting of: <ul style="list-style-type: none"> <li>• 1x plate with connecting thread G<math>\frac{3}{8}</math></li> <li>• 1x O-ring</li> <li>• 2x slot nuts</li> <li>• 2x socket head screws M6x20</li> </ul>	<b>8021863</b>	<b>VABF-P5-P1A3-G38</b>