


**SPXFLOW** 1500 Bar Standard Air Driven Bolt Tensioner Pump  
 >Bolting Systems™




HPUTP15001K

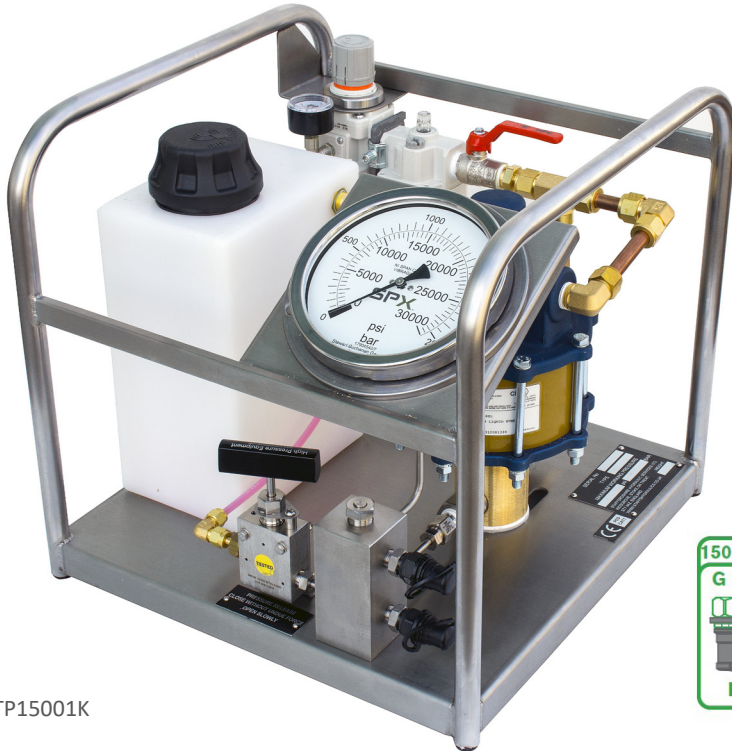

- » Working pressure 1500 bar / 27.750 psi
- » Typical flow Low Pressure 0.72 L/min
- » Typical flow at 1500 bar 0.28 L/min
- » Air consumption 0.68 m<sup>3</sup>/min at 5.5 bar
- » Air pressure safety relief valve
- » Easily adjusted pressure regulator valve
- » Calibrated 150 mm (6") Pressure Gauge
- » Pneumatic Filter/Regulator/Lubricator included
- » Cejn 116 dual oil outlets with quick-connect
- » Delivered with stainless Steel carrying frame
- » Compact, light weight, 20kg without oil
- » Brand SPX Flow, manufactured in USA

Specifications	HPUTP150001K
Operating Pressure	Max. 1500 Bar
Flow	0.72 L /min - 0.28 L /min
Air Consumption	0.68 m <sup>3</sup> /min. @5.5 Bar
	0.74 m <sup>3</sup> /min. @6.2 Bar
	0.80 m <sup>3</sup> /min. @6.9 Bar
Oil Capacity	9.5 L
Size (L x W x H)	42 cm x 42 cm x 39 cm
Weight	31 Kg

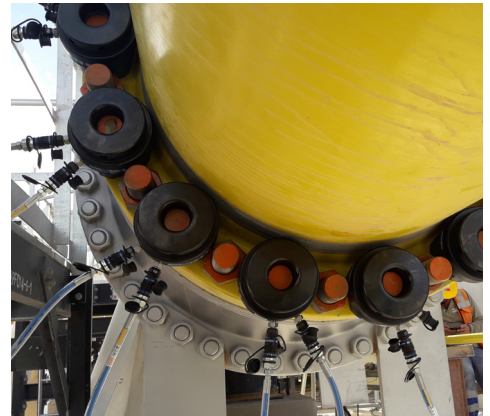

**1500 Bar Subsea Air Driven Bolt Tensioner Pump**



HPUTP15002K



Specifications	HPUTP150002K
Operating Pressure	Max. 1500 Bar
Flow	1.15 L /min - 0.50 L /min
Air Consumption	1.42 m <sup>3</sup> /min. @5.5 Bar
	1.53 m <sup>3</sup> /min. @6.2 Bar
	1.60 m <sup>3</sup> /min. @6.9 Bar
Oil Capacity	9.5 L
Size (L x W x H)	53 cm x 46 cm x 52 cm
Weight	32.5 Kg